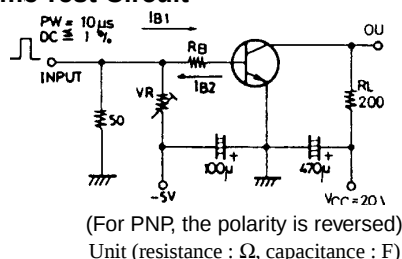


SANYO**2SA1338/2SC3392****High-Speed Switching Applications****Features**

- Adoption of FBET process.
- High breakdown voltage : $V_{CEO}=(-)50V$.
- Large current capacity and high f_T .
- Very small-sized package permitting sets to be small-sized, slim.

Switching Time Test Circuit

() : 2SA1338

Specifications**Absolute Maximum Ratings at $T_a = 25^\circ C$**

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		$(-)60$	V
Collector-to-Emitter Voltage	V_{CEO}		$(-)50$	V
Emitter-to-Base Voltage	V_{EBO}		$(-)5$	V
Collector Current	I_C		$(-)500$	mA
Collector Current (Pulse)	I_{CP}		$(-)800$	mA
Collector Dissipation	P_C		200	mW
Junction Temperature	T_j		150	$^\circ C$
Storage Temperature	T_{stg}		-55 to $+150$	$^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=(-)40V, I_E=0$			$(-)0.1$	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=(-)4V, I_C=0$			$(-)0.1$	μA
DC Current Gain	h_{FE}	$V_{CE}=(-)5V, I_C=(-)10mA$	100*		560*	
Gain-Bandwidth Product	f_T	$V_{CE}=(-)10V, I_C=(-)50mA$		300 (200)		MHz
Common Base Output Capacitance	C_{ob}	$V_{CB}=(-)10V, f=1MHz$		3.7 (5.6)		pF
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)100mA, I_B=(-)10mA$		0.1 (0.15)	0.3 (0.4)	V
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)100mA, I_B=(-)10mA$		0.8	1.2	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A, I_E=0$	$(-)60$			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)100\mu A, R_{BE}=\infty$	$(-)50$			V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)10\mu A, I_C=0$	$(-)5$			V
Turn-ON Time	t_{on}	$V_{CC}=20V$ $I_C=10I_{B1}=-10I_{B2}=100mA$		70(70)		ns
Storage Time	t_{stg}			400 (400)		ns
Fall Time	t_f			70(50)		ns

* : The 2SA1338/2SC3392 are classified by 10mA h_{FE} as follows :

2SA1338	2SC3392
100 4 200	140 5 280
200 6 400	280 7 560







Note : 2SA1338 Marking : AL, 2SC3392 Marking : AY

 h_{FE} rank : 4, 5, 6, 7**SANYO Electric Co.,Ltd. Semiconductor Business Headquarters**









TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN







71598HA (KT)/3197KI/1114KI, MT No.1421-1/4

2SA1338/2SC3392

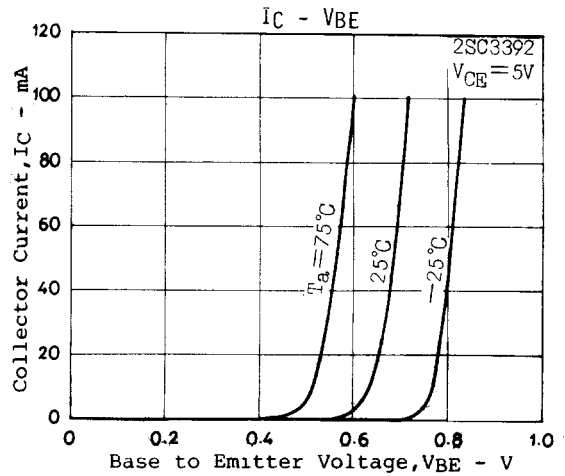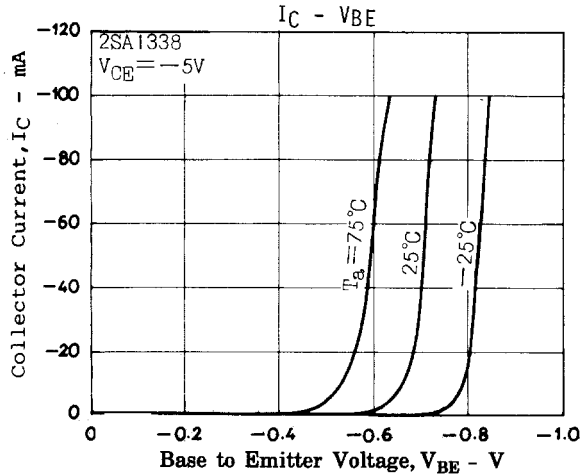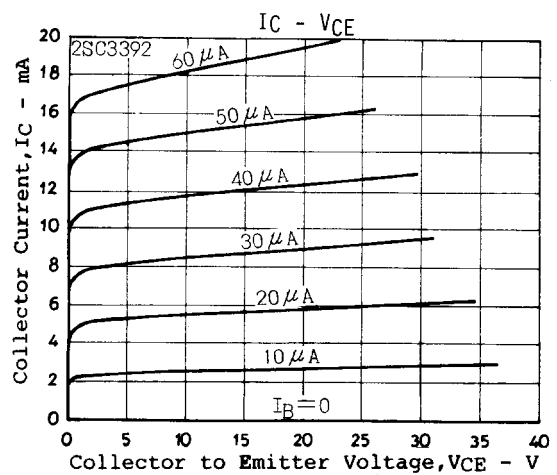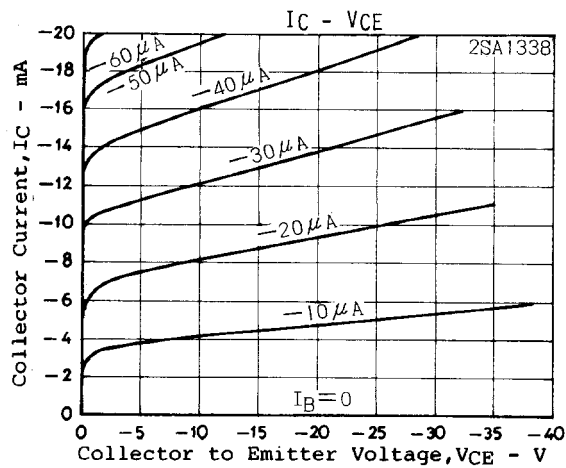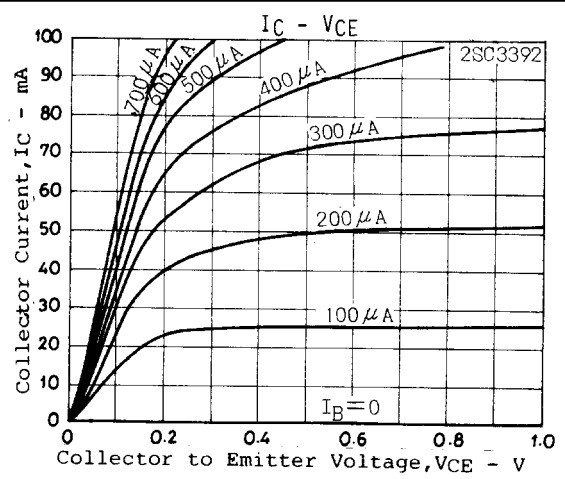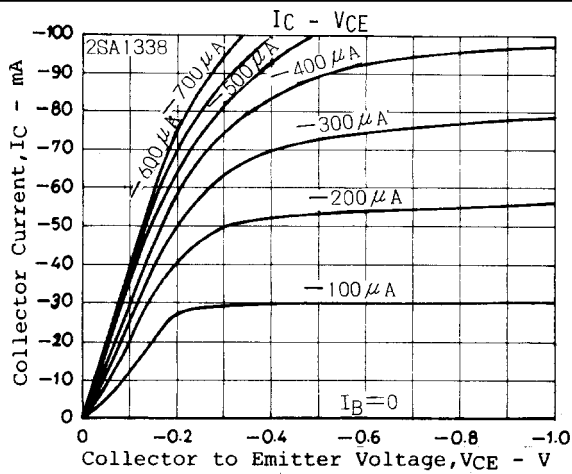

2SA1338/2SC3392

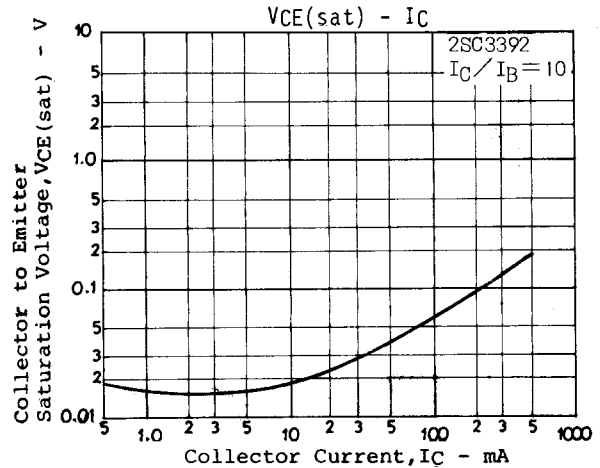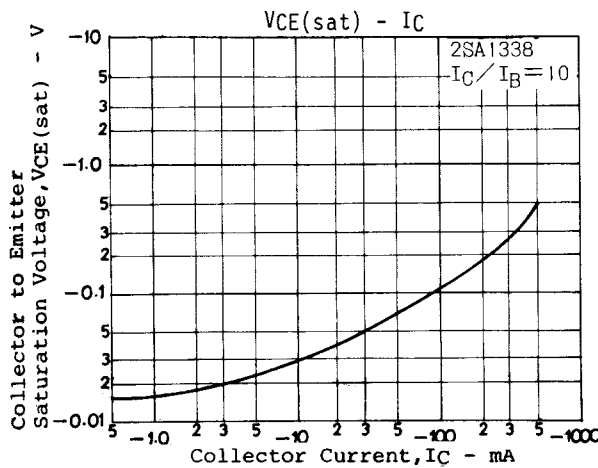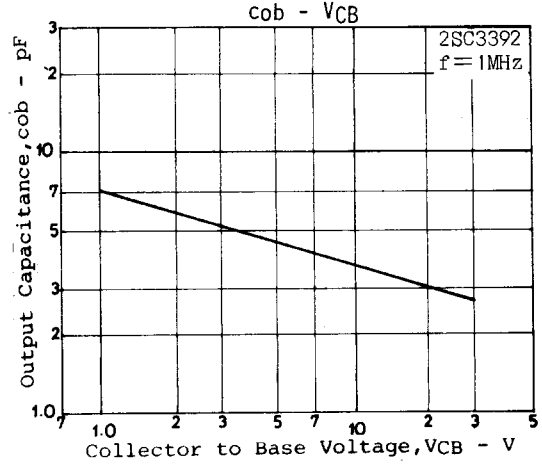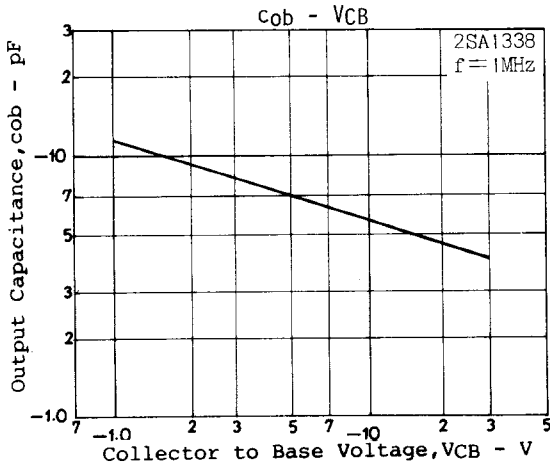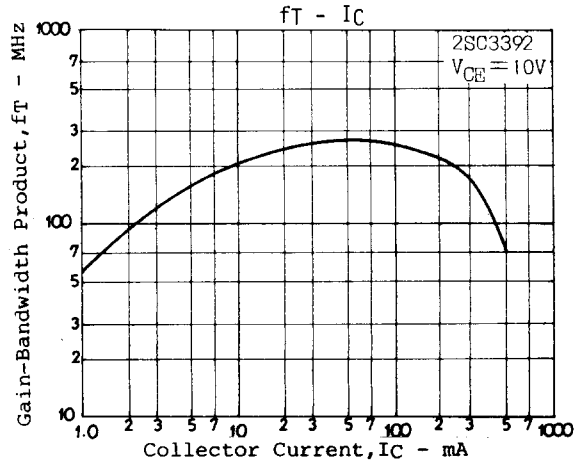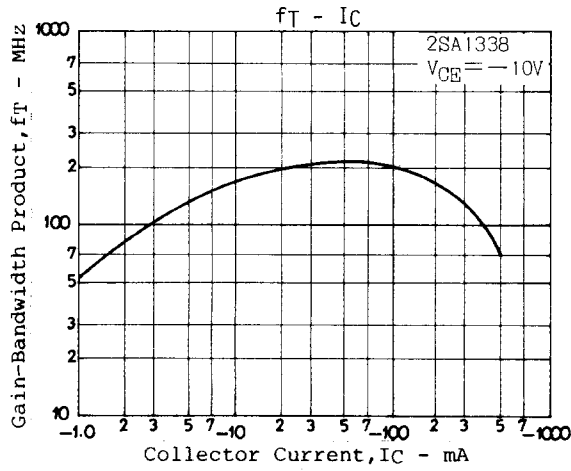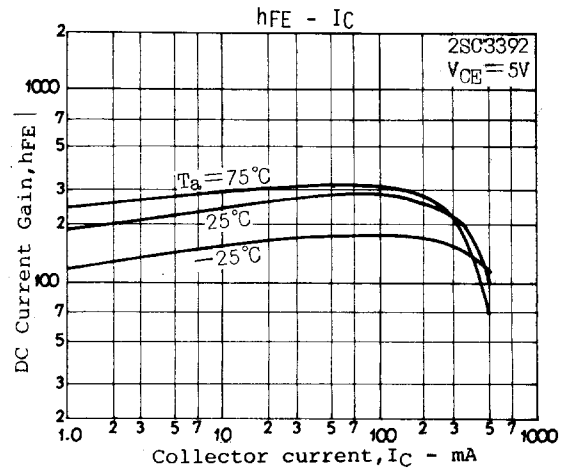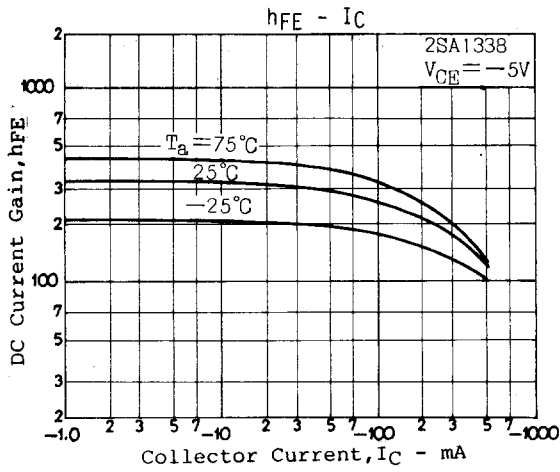

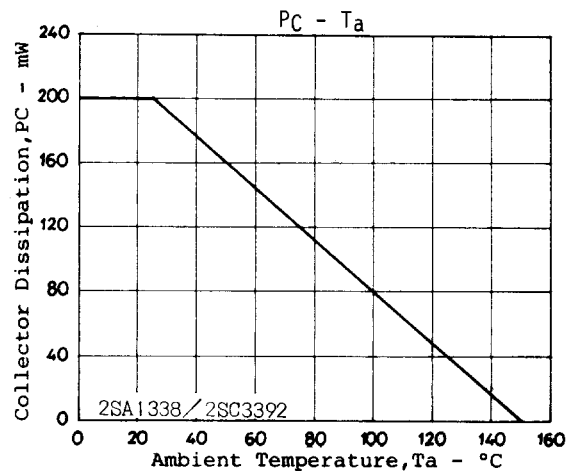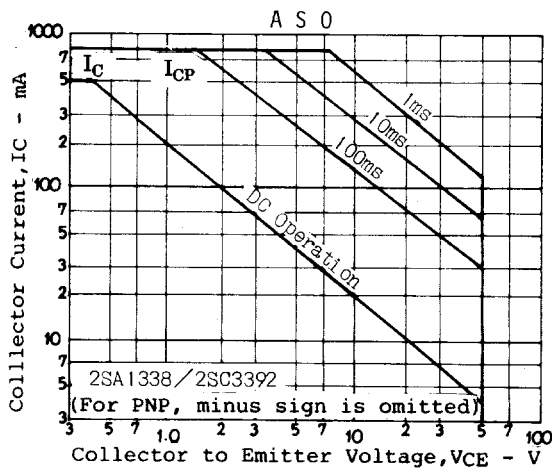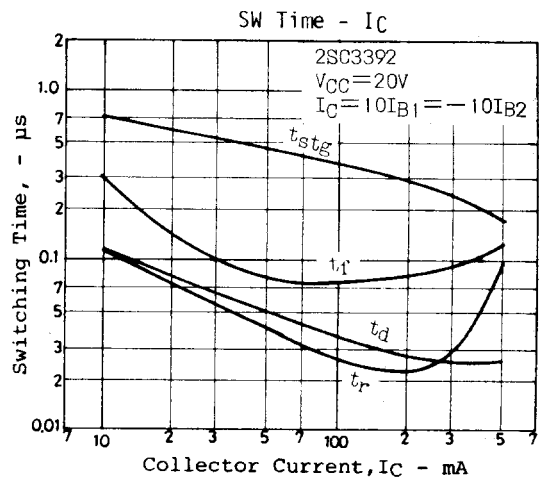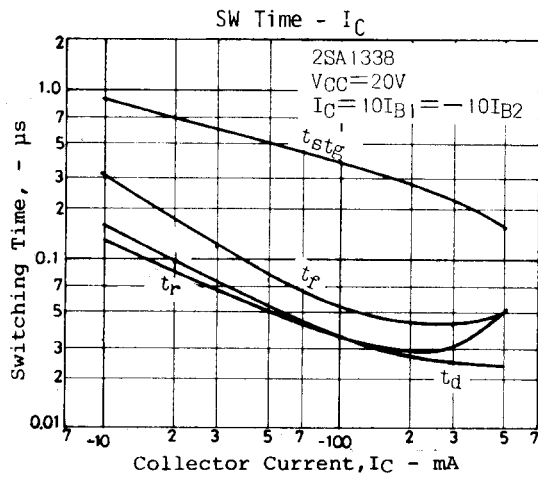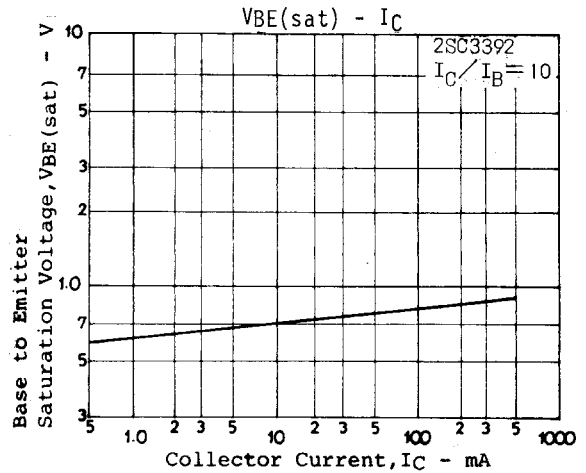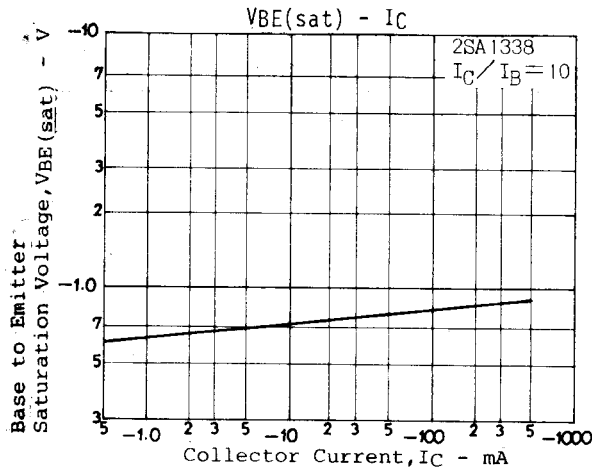

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1998. Specifications and information herein are subject to change without notice.