
2SD389 NPN EPITAXIAL SILICON TRANSISTOR

LOW FREQUENCY POWER AMPLIFIER

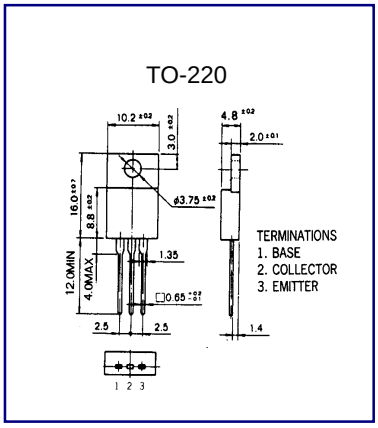

- Complement to 2SB507

ABSOLUTE MAXIMUM RATINGS (T_A=25℃)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base voltage	V_{EBO}	7	V
Collector Current (DC)	I_C	4	A
Collector Dissipation (Tc=25℃)	P_C	30	W
Junction Temperature	T_j	150	℃
Storage Temperature	Tstg	-50~150	℃

ELECTRICAL CHARACTERISTICS (T_A=25℃)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	V_{CB}= 60V , I_E=0			100	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}= 7V , I_C=0			100	μA
DC Current Gain	h_{FE1}	V_{CE}= 3V , I_C=1A		70		
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=2A , I_B=0.2A			1.0	V
Current Gain Bandwidth Product	f_T	V_{CE}= 5V , I_C=0.5A		18		MHZ

Wing Shing Computer Components Co., (H.K.)Ltd. Tel:(852)2341 9276 Fax:(852)2797 8153
Homepage: http://www.wingshing.com E-mail: wsccltd@hkstar.com