


200 V - 1,000 V Single Phase Bridge

1.4 A - 1.5 A Forward Current
70 ns - 3000 ns Recovery Time

1102A - 1110A
1102FA - 1110FA
1102UFA - 1110UFA





ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage	Average Rectified Current @TC (Io)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current tp=8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (1) (T _{rr})	Thermal Impd. θ _{J-C}
	(V _{rw})	55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
	Volts	Amps	Amps	μA	μA	Volts	Amps	Amps	Amps	ns	°C/W
1102A	200	1.5	1.0	1.0	25	1.1	1.0	50	10	3000	22.5
1106A	600	1.5	1.0	1.0	25	1.1	1.0	50	10	3000	22.5
1110A	1000	1.5	1.0	1.0	25	1.1	1.0	50	10	3000	22.5
1102FA	200	1.5	1.0	1.0	25	1.3	1.0	25	6.0	150	22.5
1106FA	600	1.5	1.0	1.0	25	1.3	1.0	25	6.0	150	22.5
1110FA	1000	1.5	1.0	1.0	25	1.3	1.0	25	6.0	150	22.5
1102UFA	200	1.4	0.9	1.0	25	1.7	1.0	25	5.0	70	22.5
1106UFA	600	1.4	0.9	1.0	25	1.7	1.0	25	5.0	70	22.5
1110UFA	1000	1.4	0.9	1.0	25	1.7	1.0	25	5.0	70	22.5

(1)T_{rr} Testing: I_f=0.5A, I_r=1.0A, I_{rr}=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

10

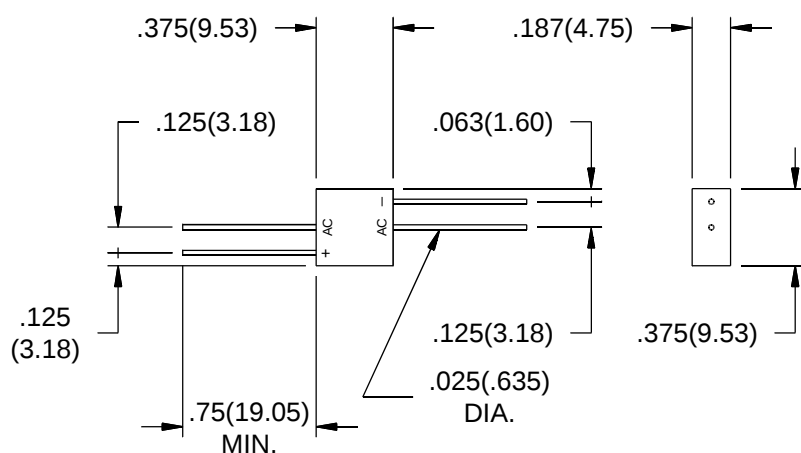




Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

1102A - 1110A • 1102FA - 1110FA • 1102UFA - 1110UFA

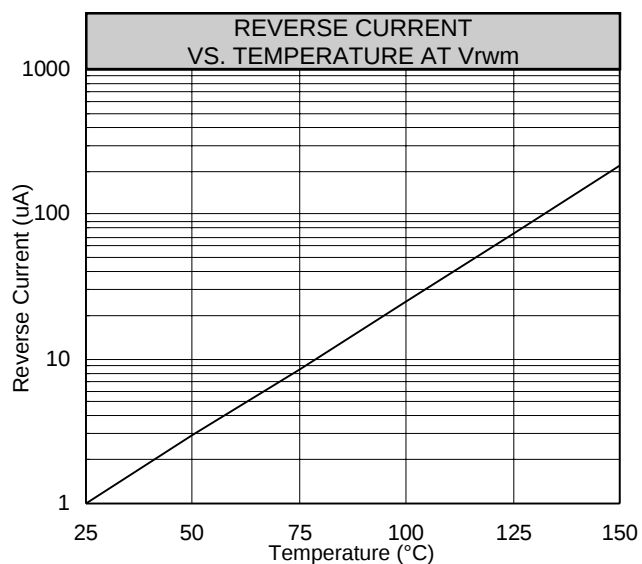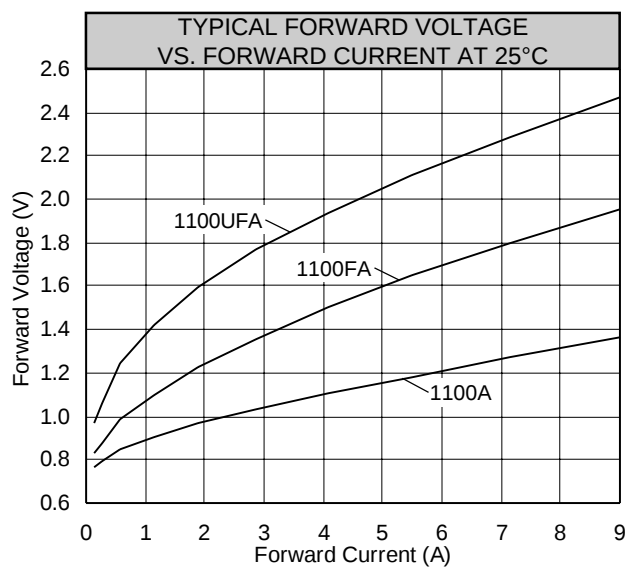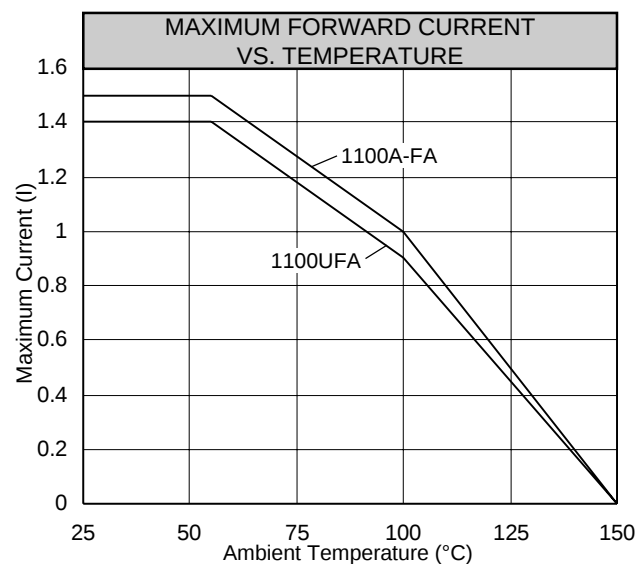

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.