

AF4871A Boomer Audio Power Amplifier Series

1.1W Audio Power Amplifier with Shutdown Mode

● Features

THD at 1 kHz at 1W continuous

average output power into 8Ω 0.5%

Output power at 10% THD+N at 1 kHz into 8Ω 1.5W

Shutdown Current 0.6 μA

● General Description

The AF4871A is a bridge-connected audio power amplifier capable

of delivering typically 1.1W of continuous average power to an 8Ω load with 0.5% (THD) from a 5V power supply.

Boomer audio power amplifiers were designed specifically to provide high quality output power with a minimal amount of external components. Since the AF4871A does not require output

coupling capacitors, bootstrap capacitors, or snubber networks, it is optionally suited for low-power portable systems.

The AF4871A features an externally controlled, low-power consumption shutdown mode, as well as an internal thermal shutdown protection mechanism.

The unity-gain stable AF4871A can be configured by external gain-setting resistors.


● Applications

Portable Computers


Desktop Computers

Low Voltage Audio Systems


● Package Information

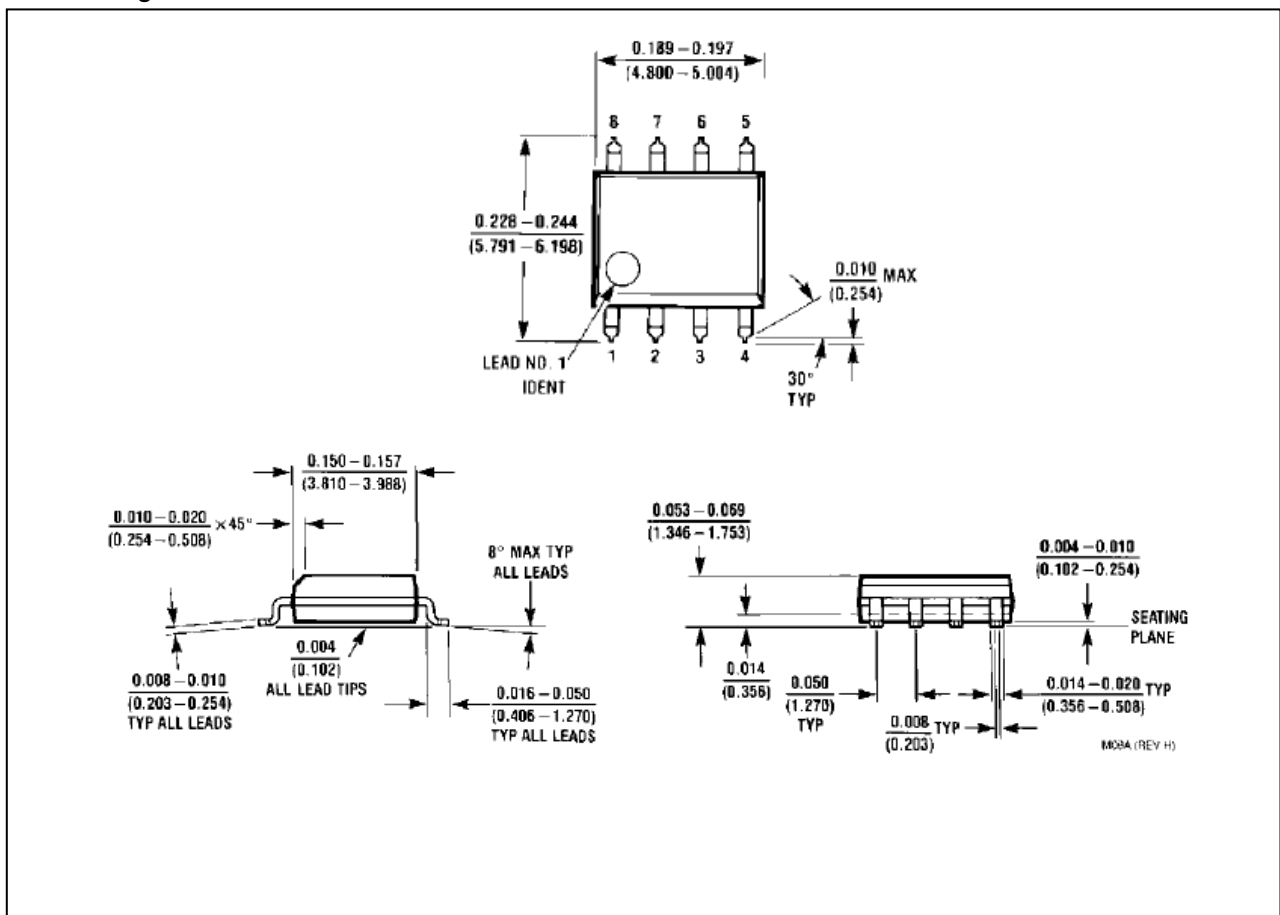

● Typical Application

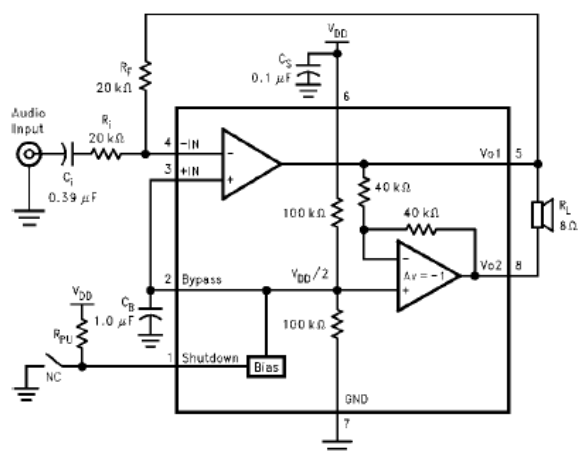

● PIN CONFIGURATION

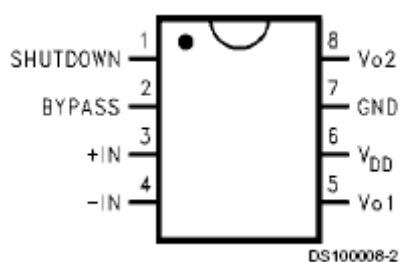

● Absolute Maximum Ratings @TA = 25°C unless otherwise noted

Supply Voltage	-----6.0V
Storage Temperature	-----65°C to +150°C
Input Voltage	-----0.3V to VDD + 0.3V
Power Dissipation	----- Internally Limited
ESD Susceptibility	-----5000V
Junction Temperature	-----150°C


● Electrical Characteristics

The following specifications apply for VDD = 5V unless otherwise specified. Limits apply for TA = 25°C.


Symbol	Parameter	Conditions	Typical	Limit	Units
VDD	Supply Voltage			2.0-5.5	V
IDD	Quiescent Power Supply Current	VIN = 0V, Io = 0A	6.5	10	mA
ISD	Shutdown Current	VPIN1 = VDD	0.6	2	uA
VOS	Output Offset Voltage	VIN = 0V	5	50	mV
Po	Output Power	THD = 0.5% (max); f = 1 kHz	1.1	1	W
		THD+N = 10%; f = 1 kHz	1.5		W
THD+N	Total Harmonic Distortion+Noise	Po = 1 Wrms; AVD = 2; 20 Hz < f < 20 kHz	0.25		%
PSRR	Power Supply Rejection Ratio	VDD = 4.9V to 5.1V	65		dB

• Typical Performance Characteristics


THD+N vs Frequency

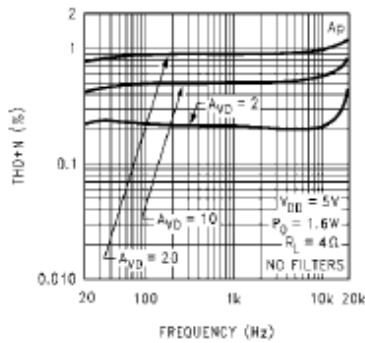


THD+N vs Frequency

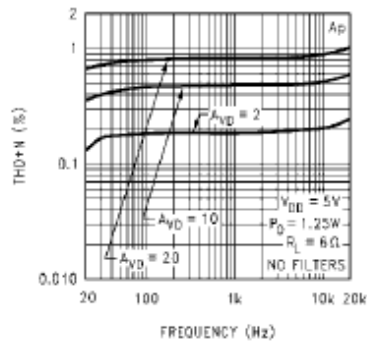


THD+N vs Frequency

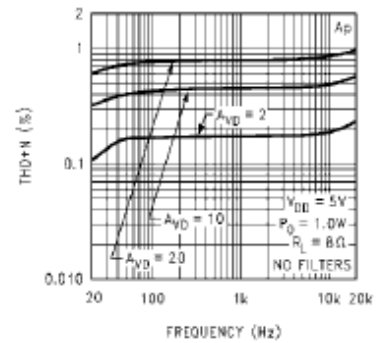



THD+N vs Output Power

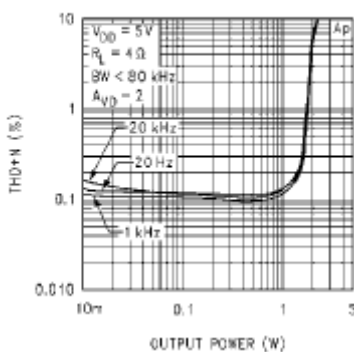


THD+N vs Output Power

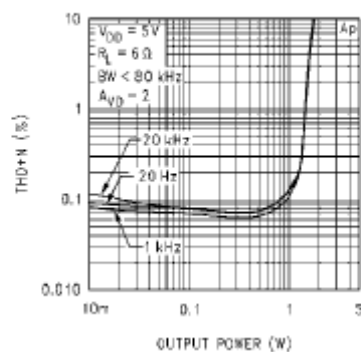


THD+N vs Output Power

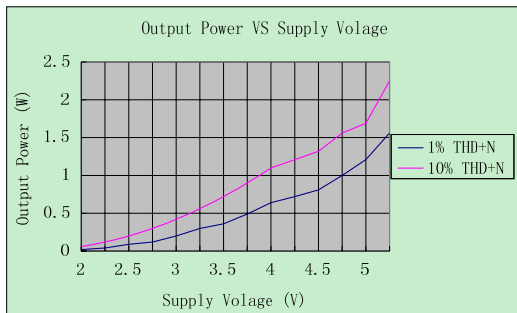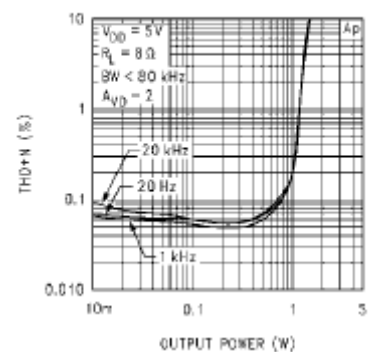


Output Power vs Load Resistance




Power Dissipation vs Output Power




Power Derating Curve

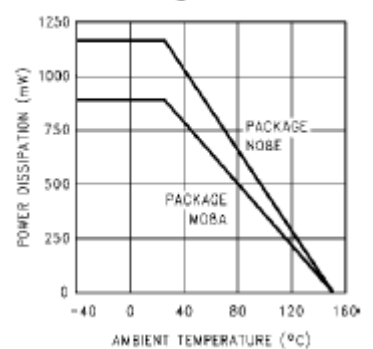


Clipping Voltage vs Supply Voltage

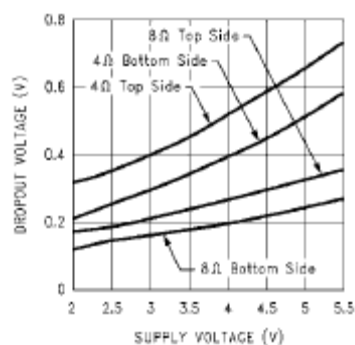


Noise Floor

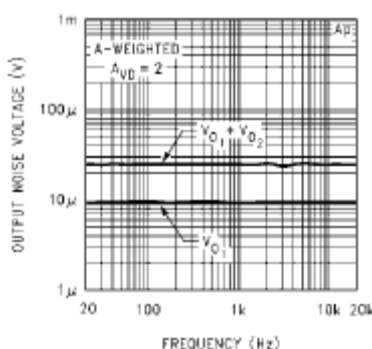


Frequency Response vs Input Capacitor Size

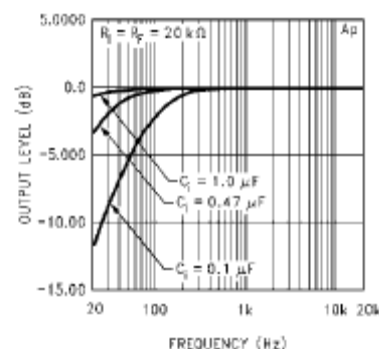


Power Supply Rejection Ratio

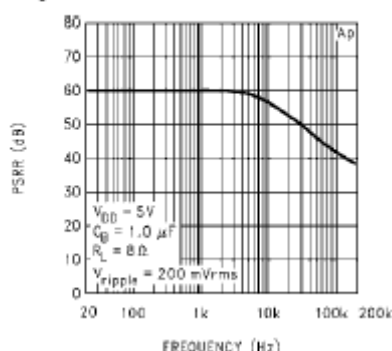

Open Loop Frequency Response

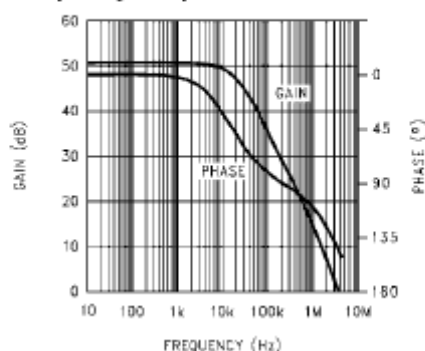

Supply Current vs Supply Voltage

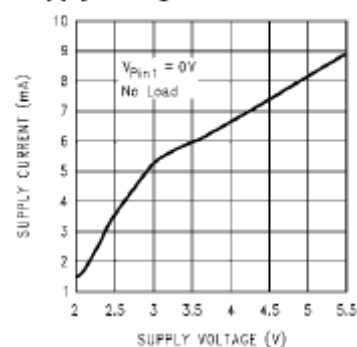

DISCLAIMER

ANALOG FUTURE COMPANY RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. ANALOG FUTURE DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE A STATISTICAL SUMMARY BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDE FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.