

AZ Displays, Inc.

1. MECHANICAL DATA

(1) Part Name	AGM2464C		
(2) Module Size	180.0(W)mm X 65.0(H)mm X MAX9.5(D)mm (W/O,EL B/L)		
	180.0(W)mm X 65.0(H)mm X MAX14.5(D)mm (LED B/L)		
	190.0(W)mm X 65.0(H)mm X MAX13.8(D)mm (CCFL B/L)		
(3) Dot Size	0.49	(W)mm x	0.49 (H)mm
(4) Dot Pitch	0.53	(W)mm x	0.53 (H)mm
(5) Number of Dots	240	(W)	x 64 (H)Dots
(6) Duty	1/64		
(7) LCD Display Mode	STN:	☐ Gray Mode	☐ Yellow Mode ☐ Blue Mode
	Rear Polarizer:	☐ Reflective	☐ Transflective ☐ Transmissive
(8) Viewing Direction	☐ 6 O'clock	☐ 12 O'clock	
(9) Backlight	☐ W/O	☐ EL B/L	☐ LED B/L ☐ CCFL B/L
(10) Weight	W/O	B/L:	128.5 g
	EL	B/L:	135.5 g
	LED	B/L:	164.0 g
	CCFL	B/L:	173.0 g

Revised: July 7, 2000

AZ Displays, Inc.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Input Voltage	VI	-0.3	VDD	V	
Static Electricity	-	-	-	-	Note 1

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.				WIDE TEMP.			
	OPERATING		STORAGE		OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70	-20	70	-30	80
Humidity (Without Condensation)	Note 2,4		Note 3,4		Note 4,5		Note 4,6	

Note 1 LCM should be grounded during handling

Note 2 $T_a \leq 50^{\circ}\text{C}$: 85%RH max

$T_a > 50^{\circ}\text{C}$: Absolute humidity must be lower
than the humidity of 85%RH at 50°C

Note 3 T_a at -20°C will be $< 48\text{hrs}$, at 70°C will be $< 120\text{hrs}$

Note 4 Background color changes slightly depending on ambient temperature.
This phenomenon is reversible.

Note 5 $T_a \leq 70^{\circ}\text{C}$: 75%RH max

$T_a > 70^{\circ}\text{C}$: Absolute humidity must be lower
than the humidity of 75%RH at 70°C

Note 6 T_a at -30°C will be $< 48\text{hrs}$, at 80°C will be $< 120\text{hrs}$

AZ Displays, Inc.

3. ELECTRICAL CHARACTERISTICS (VDD = 5V±10%)

ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Input Voltage		VIH	H level		0.7VDD	—	VDD	V
		VIO	L level		0	—	0.3VDD	V
Recommended LC Driving Voltage (Normal Temp. LCM)		VDD—VO	Duty= 1/64 Bias= 1/9	0℃	—	13.3	13.8	V
				25℃	11.7	12.5	13.1	
				50℃	10.8	11.4	—	
Recommended LC Driving Voltage (Wide Temp. LCM)		VDD—VO	Duty= 1/64 Bias= 1/9	—20℃	11.7	12.1	12.5	V
				0℃	11.6	12.0	12.4	
				25℃	11.5	11.9	12.3	
				50℃	11.4	11.8	12.2	
				70℃	11.3	11.7	12.1	
Power Supply Current		IDD	FLM=70 Hz VDD=5.0 V VDD—VO=12.5 V PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		—	18.5	—	mA
EL Power Supply Current		I _{EL}	V _{BL} = 110 V _{rms} 400 Hz (R _{BL} = 0 Ω)		—	—	10.0	mA _{rms}
LED Power Supply Current		I _{LED}	V _{BL} = 5.0 V (R _{BL} = 5 Ω)		—	220	—	mA
CCFL	Starting Voltage	V _{FLS}	—		—	900	—	V _{rms}
	Driving Voltage	V _{FLD}	—		—	450	—	V _{rms}
	Driving Current	I _{FLD}	V _{FLD} = 450V _{rms} f _{FLD} = 30KHZ		—	5.0	—	mA _{rms}
	Driving Voltage	f _{FL}	—		15	30	50	KHZ

AZ Displays, Inc.

4.OPTICAL CHARACTERISTICS

4-1 Optical Char. of Normal Temp. Mode

AT V_{OP}

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	C	—	7.5	—	80	—	35
S	B	—	4.2	—	70	—	30
	C	—	6.5	—	75	—	35
T	E	—	4.0	—	70	—	35
note		NOTE6		NOTE5			

note:

R: REFLECTIVE
S: TRANSFLECTIVE
T: TRANSMISSIVE

B: GRAY 12 O'CLOCK
C: YELLOW 6 O'CLOCK
E: BLUE 6 O'CLOCK

AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0°C	—	600	1200	ms	NOTE 2
		25°C	—	110	220		
		50°C	—	50	100		
Response Time (fall)	Tf	0°C	—	900	1500	ms	NOTE 2
		25°C	—	250	360		
		50°C	—	100	150		

AZ Displays, Inc.

4-2 Optical Char. of Wide Temp. Mode

AT Vop

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	C	—	7.0	—	60	—	65
S	C	—	6.5	—	56	—	64
note		NOTE6		NOTE5			

note:

R: REFLECTIVE
S: TRANSFLECTIVE

C: YELLOW 6 O'CLOCK


AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20°C	—	2100	3200	ms	NOTE 2
		0°C	—	450	680		
		25°C	—	150	250		
		50°C	—	110	170		
		70°C	—	70	90		
Response Time (fall)	Tf	-20°C	—	2100	3200	ms	NOTE 2
		0°C	—	400	600		
		25°C	—	120	180		
		50°C	—	60	100		
		70°C	—	30	50		


AZ Displays, Inc.

(FIG 1)

Definition of Operation Voltage(Vop)

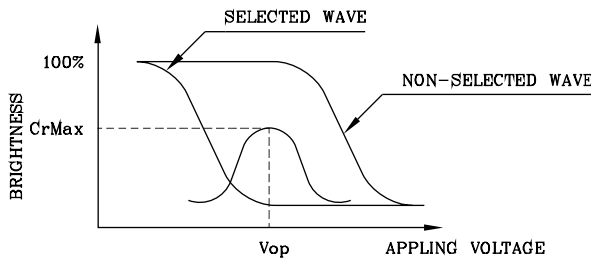

(positive type)

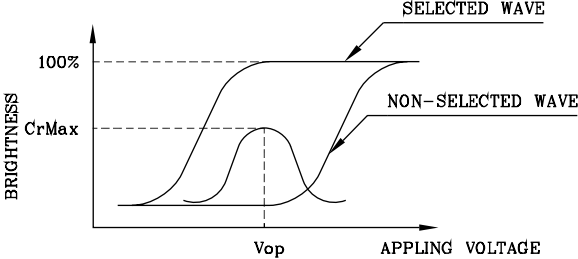


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : I/N duty 1/a bias

(FIG 2)

Definition of Response Time(Tr,Tf)

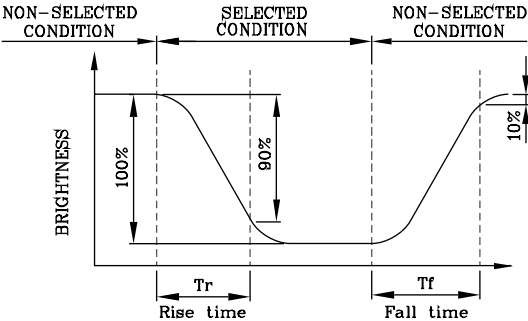

(positive type)

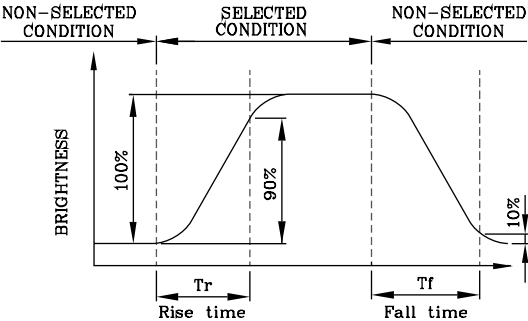


(negative type)

*Conditions


Operating Voltage : Vop
Viewing Angle (θ, θ) : (0,0)
Frame Frequency : 70Hz
Applying Waveform : I/N duty 1/a bias

(FIG 3)

Description of Measuring Equipment and Driving Waveforms

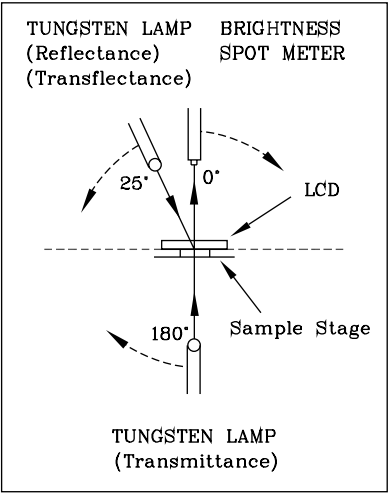


CONST.
TEMP.
CHAMBER

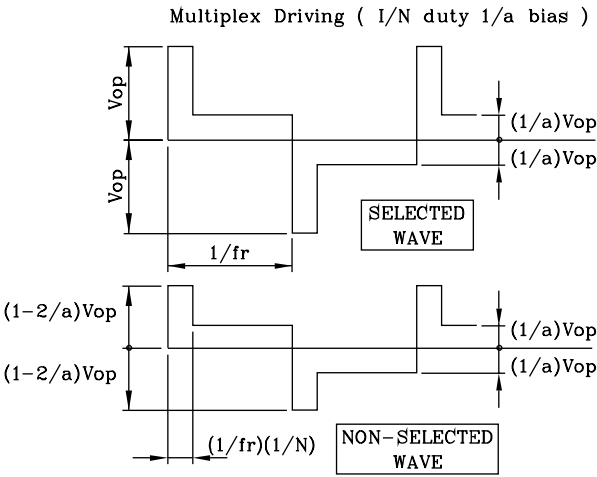

AZ Displays, Inc.



(NOTE 4)

Definition of Viewing Direction

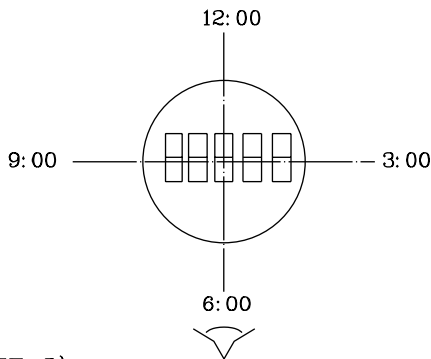

(NOTE 5)

Definition of Viewing Angle

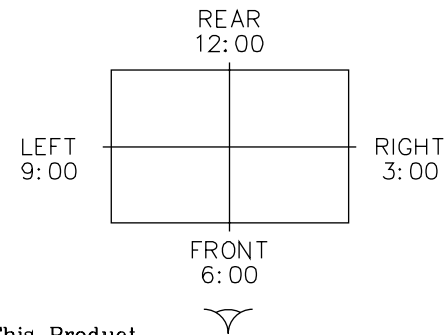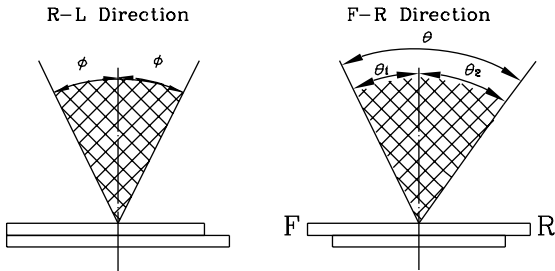

*For This Product
The Viewing Direction Is 6 O'clock
So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

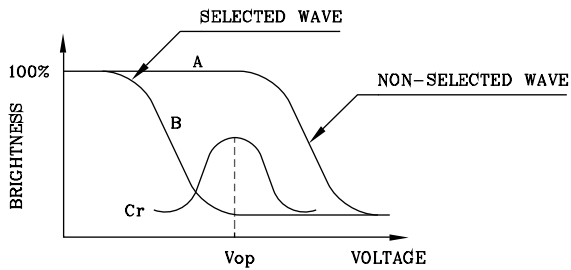

(positive type)

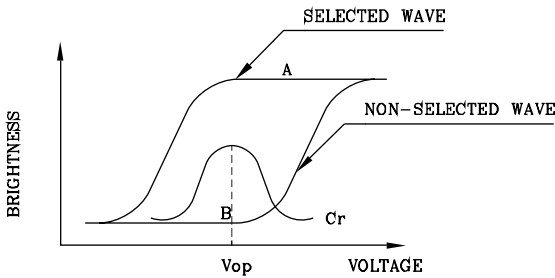

(negative type)


$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

AZ Displays, Inc.

5. BLOCK DIAGRAM

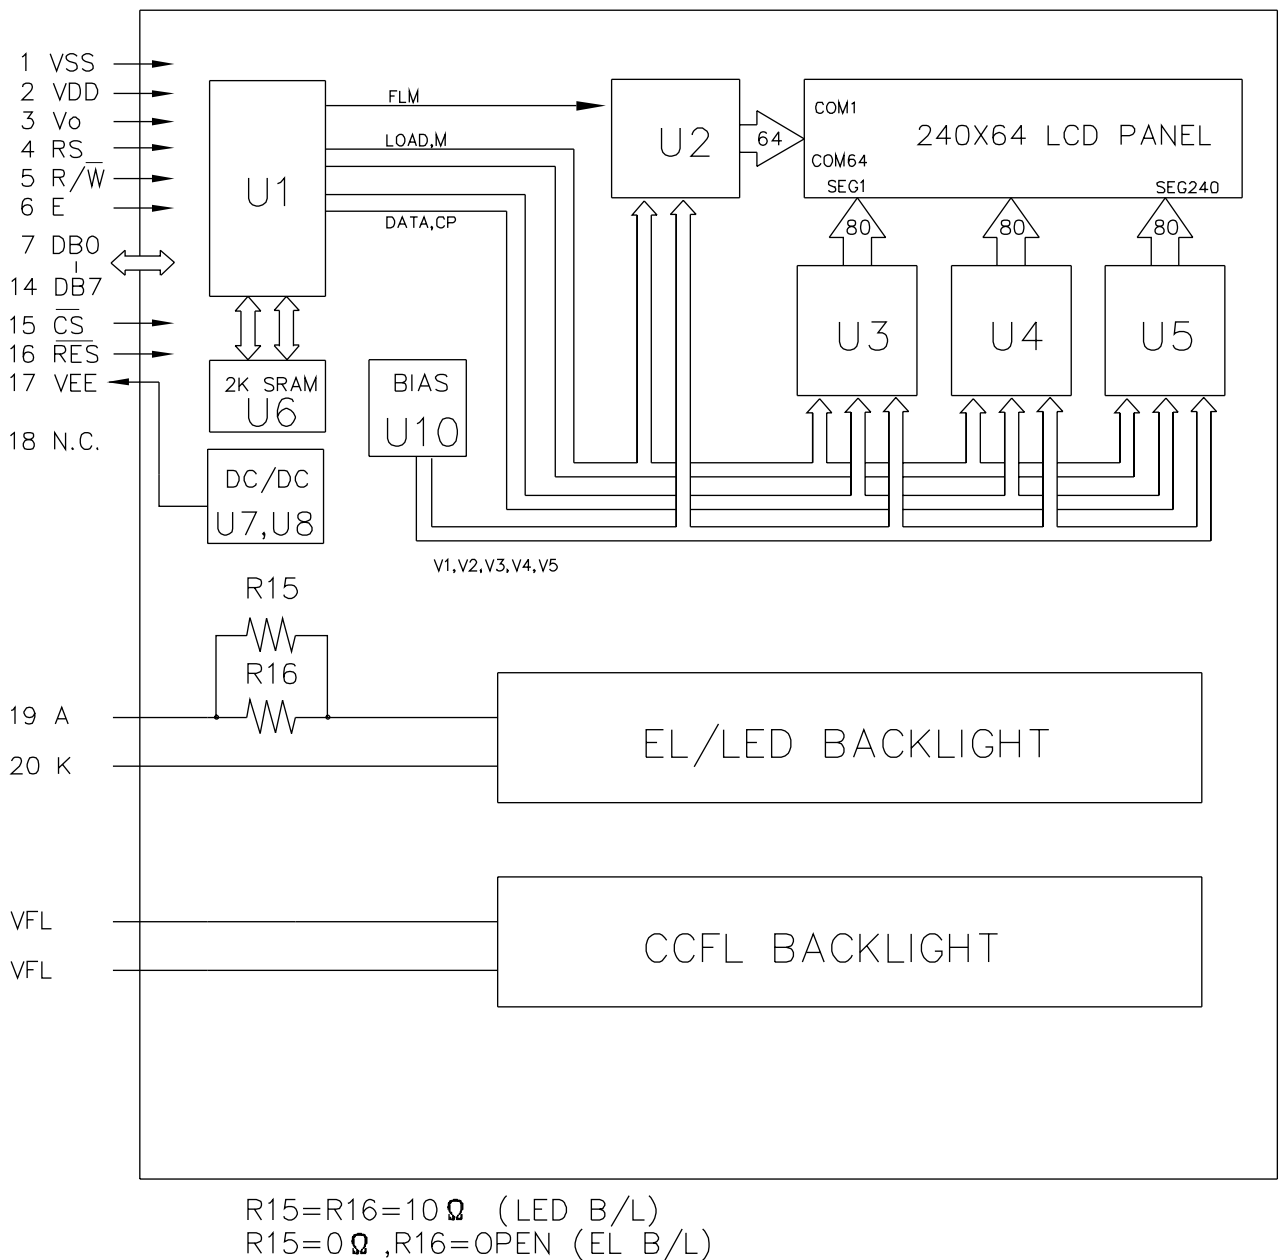

AZ Displays, Inc.

6.INTERNAL PIN CONNECTION


PinNo.	Symbol	Level	Function	
1	V _{SS}	—	0V	Power supply
2	V _{DD}	—	+5V	
3	V _O	—	—	
4	RS	H/L	H: INSTRUCTION CODE INPUT L: DATA INPUT	
5	R/ $\overline{W}$	H/L	H: DATA READ (LCM TO MPU) L: DATA WRITE (MPU TO LCM)	
6	E	H, H→L	ENABLE SIGNAL	
7	DB0	H/L	DATA BUS LINE	
8	DB1	H/L		
9	DB2	H/L		
10	DB3	H/L		
11	DB4	H/L		
12	DB5	H/L		
13	DB6	H/L		
14	DB7	H/L		
15	$\overline{CS}$	L	CHIP ENABLE ACTIVE "L"	
16	$\overline{RES}$	L	RESET ACTIVE "L"	
17	VEE	—	NEGATIVE VOLTAGE OUTPUT	
18	N.C.	—	NO CONNECTION	
19	A	—	POWER SUPPLY FOR BACKLIGHT	
20	K	—	POWER GND FOR BACKLIGHT	

CCFL Connector : J.A.E/IL-G-4S-S3C2

PIN NO	SYMBOL	FUNCTION
1	VFL	POWER SUUPLY FOR CCFL DRIVE
2	NC	—
3	NC	—
4	VFL	POWER SUUPLY FOR CCFL DRIVE

AZ Displays, Inc.

7. POWER SUPPLY

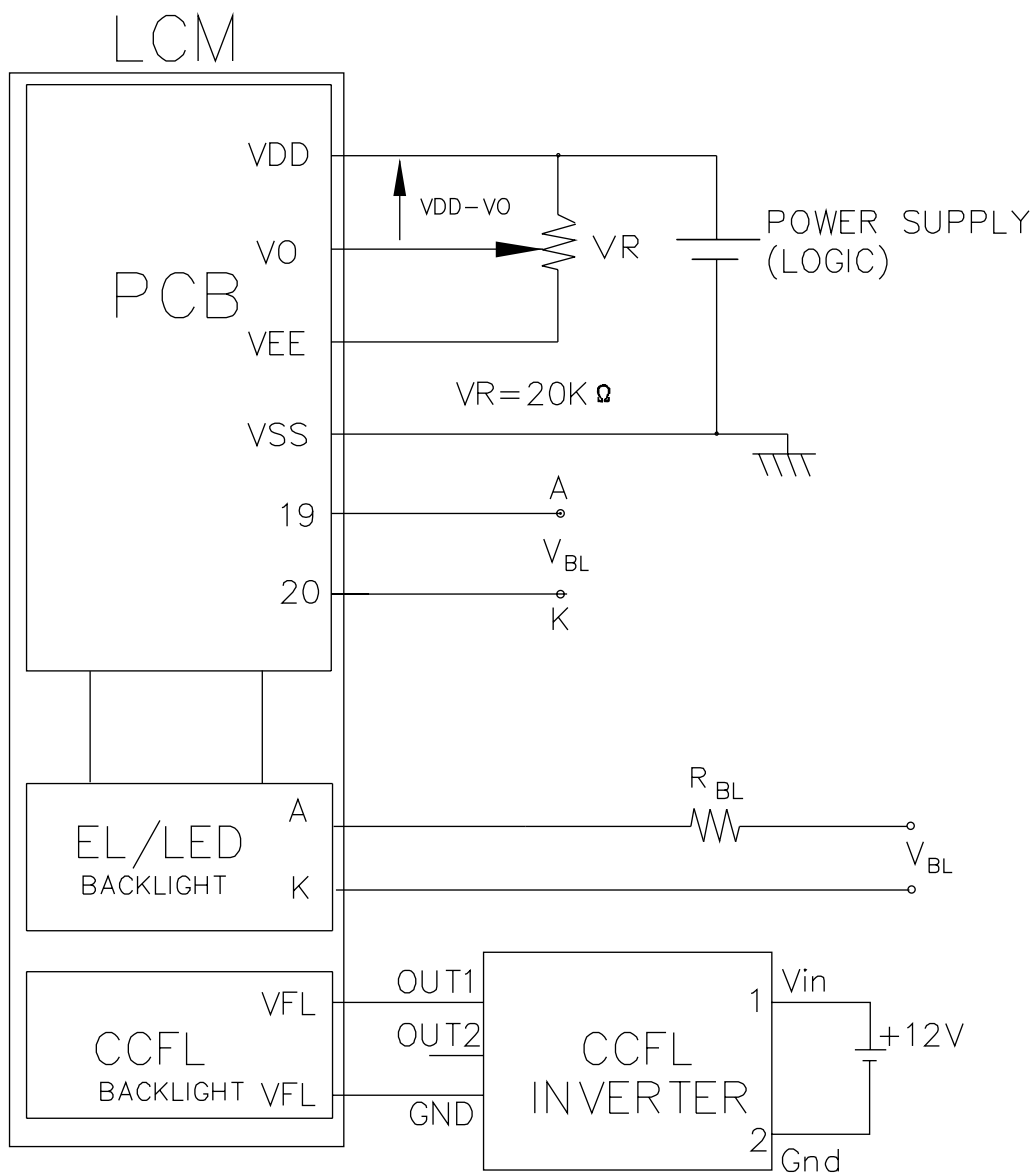

Recommended Inverter : CXA-L10L (TDK)

Recommended Value for R_{BL} and V_{BL}

ITEM Back Light Interface	R_{BL}		V_{BL}	
	EL	LED	EL	LED
A,K PAD	0 Ω	5 Ω	110 V _{Ac} 400Hz	5V _{Dc}

AZ Displays, Inc.

8. TIMING CHARACTERISTICS

8-1 INTERFACE TIMING

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Enable cycle time	t_{cyc}	Fig.a, Fig.b	1.0	—	—	μs
Enable pulse width	PW_{EH}	Fig.a, Fig.b	450	—	—	ns
Enable rise/fall time	t_{Er}, t_{Ef}	Fig.a, Fig.b	—	—	25	ns
RS,R/ $\bar{W}$ set up time	t_{AS}	Fig.a, Fig.b	140	—	—	ns
Data delay time	t_{DDR}	Fig.b	—	—	225	ns
Data set up time	t_{DSW}	Fig.a	225	—	—	ns
Hold time	t_H	Fig.a, Fig.b	20	—	—	ns

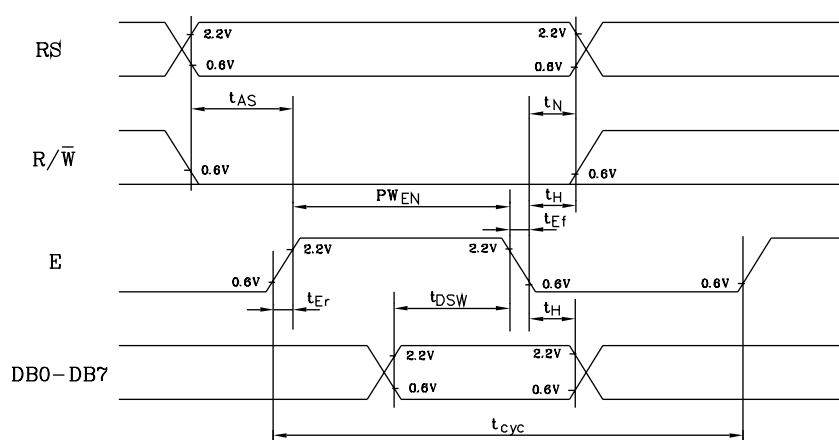


Fig. a Interface timing (data write)


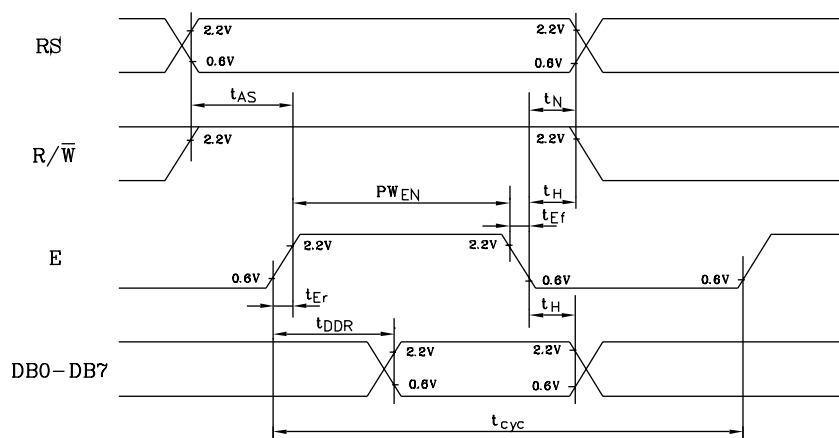


Fig. b Interface timing (data read)


AZ Displays, Inc.

8-2 POWER ON/OFF TIMING

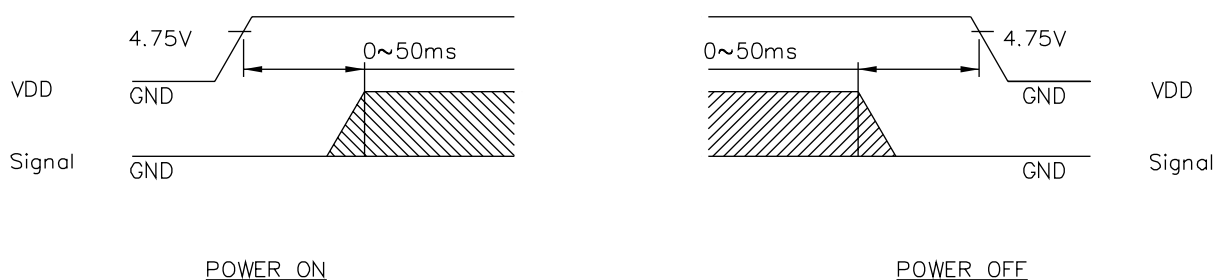


Missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

8-3 DISPLAY PATTERN

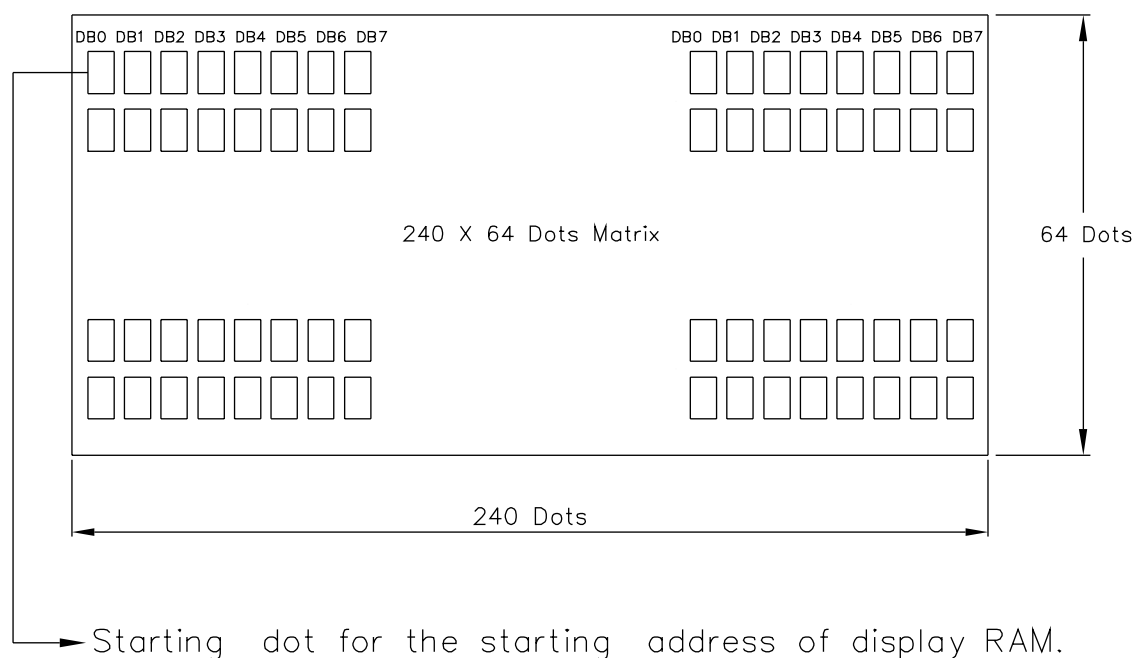

DB0~DB7 are 8 bits transmitted data ,where DB0 is LSB and DB7 is MSB.

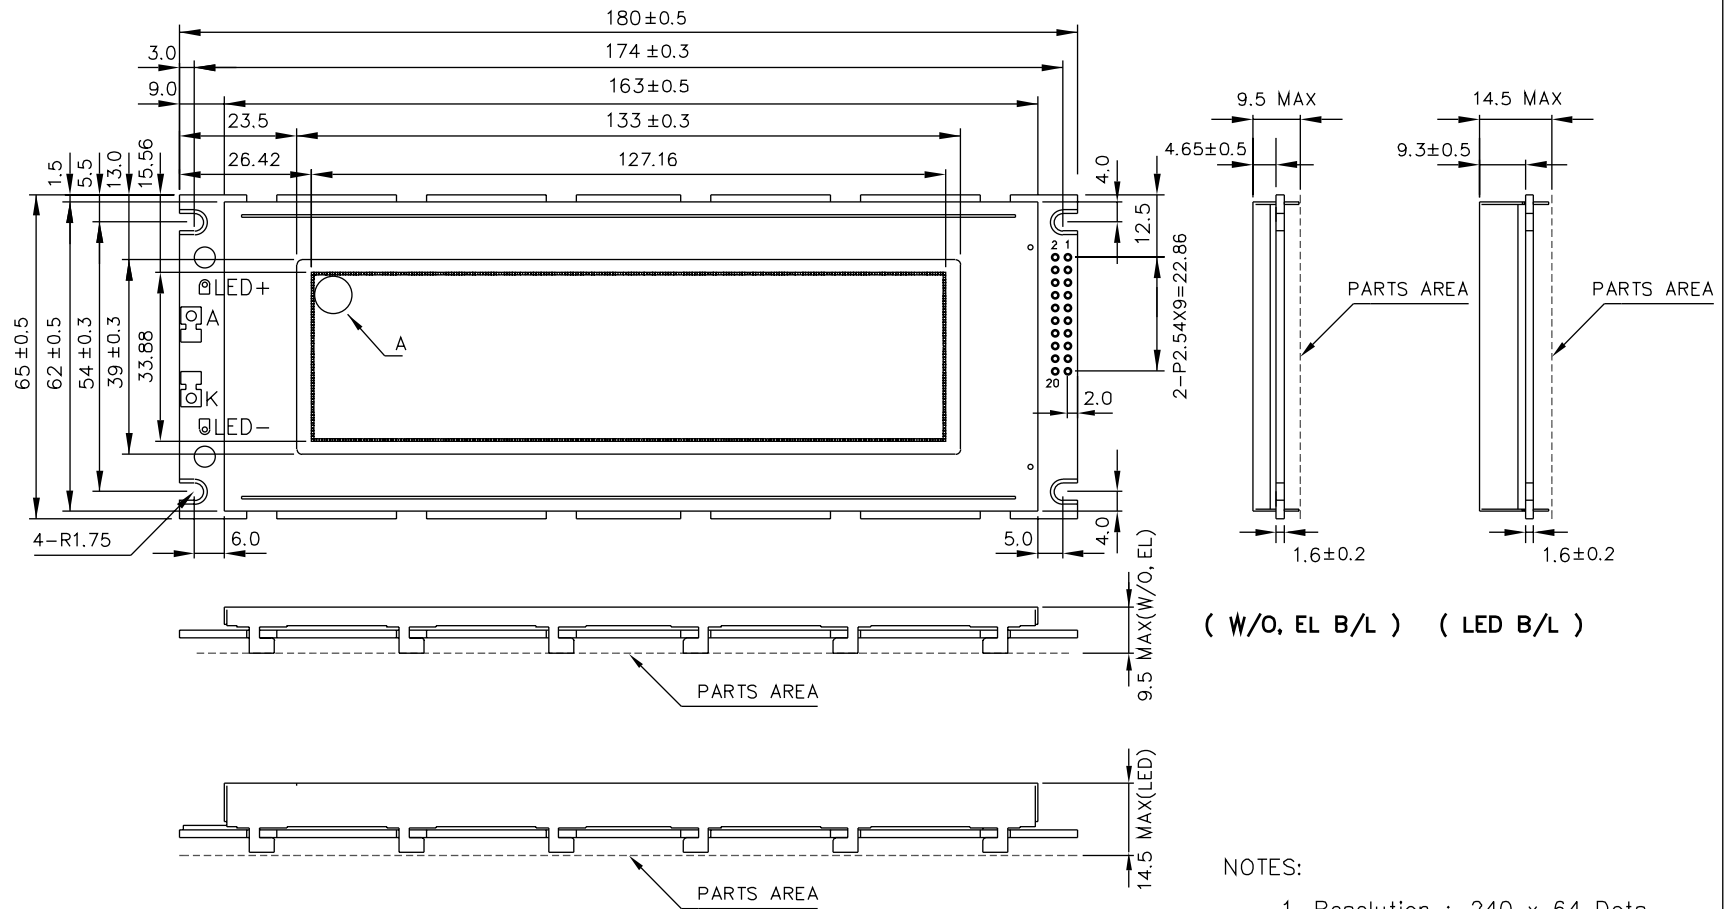


(W/O, EL B/L) (LED B/L)

NOTES:

1. Resolution : 240 x 64 Dots
2. Controller : LC7981(Compatible)
3. DC/DC Converter : BUILT-IN
4. Bezel Material : SPCC
5. General Tolerance : ±0.5 mm


PIN NO.	SYMBOL
1	V _{SS}
2	V _{DD}
3	V _O
4	RS
5	R/W
6	E
7-14	DB0-DB7
15	CS
16	RES
17	V _{EE}
18	N.C.
19	A
20	K



AGM2464C			AZ DISPLAYS, INC.		
APPROVE	NAME	DATE	TITLE		
CHECK			DWG-NO	MXAX003X	Rev.A
DESIGN					
DRAW	MAY PING	87.10.12			



UNIT : mm
SCALE : 1/1

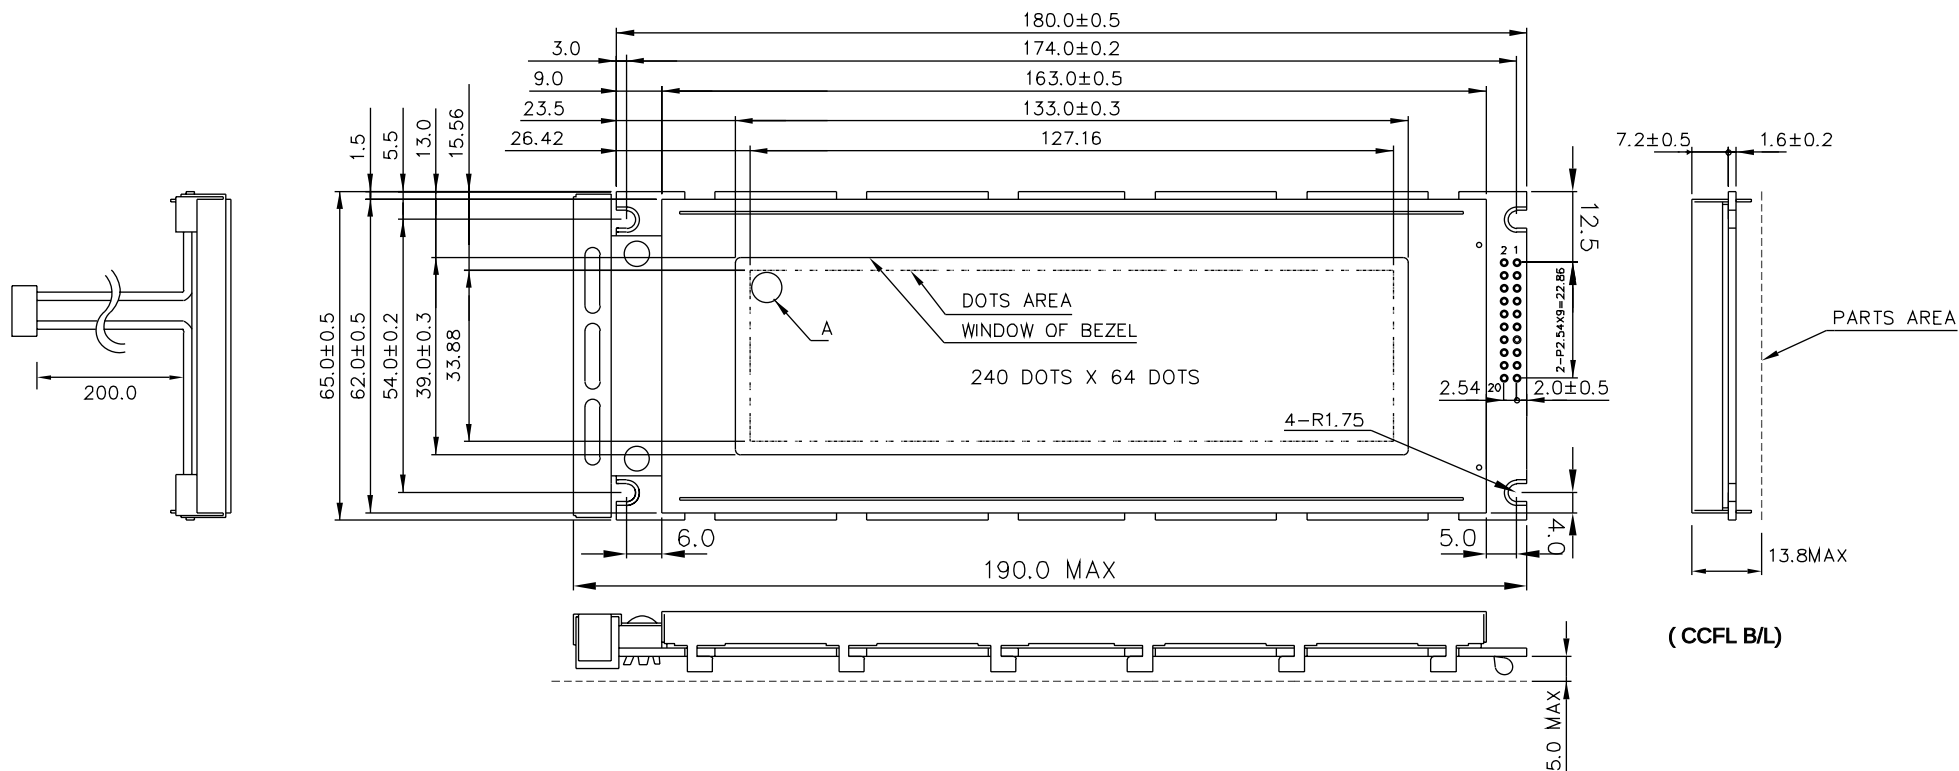


(CCFL B/L)

NOTES:

- Resolution : 240 x 64 Dots
- Controller : LC7981(Compatible)
- DC/DC Converter : BUILT-IN
- Bezel Material : SPCC
- General Tolerance : ±0.5 mm

PIN NO.	SYMBOL
1	VSS
2	VDD
3	Vo
4	RS
5	R/W
6	E
7-14	DB0-DB7
15	CS
16	RES
17	VEE
18	N.C.
19	A
20	K



A DETAIL

AGM2464C		AZ DISPLAYS, INC.		
APPROVE	NAME	DATE	TITLE	
CHECK			DWG-NO	MBAX003X
DESIGN			Rev.A	
DRAW	MAY PING	88.02.11	UNIT : mm	SCALE : 1/1