

SMALL SIGNAL NPN TRANSISTOR WITH CONTROLLED BASE-EMITTER VOLTAGE

Features

- Low Deviation in Base-Emitter Voltage
- Surface Mount Package
- Ideally Suited for Automated Assembly Processes
- **Lead Free by Design/RoHS Compliant (Note 2)**
- "Green" Device (Note 2)

Mechanical Data

- Case: SOT-23
- Case material: Molded Plastic. "Green Molding" Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals Connections: See Diagram
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Marking Type Code Information: See Page 4
- Ordering Information: See Page 4
- Weight: 0.008 grams (approximate)




Fig. 1 SOT-23




Fig. 2 : Schematic and Pin Configuration

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	45	V
Emitter-Base Voltage	V_{EBO}	6	V
Output Current - Continuous (Note 3)	I_C	200	mA
Peak Collector Current	I_{CM}	200	mA
Peak Emitter Current	I_{EM}	200	mA
Power Dissipation (Note 3)	P_d	300	mW
Power Deration	P_{der}	2.4	mW/ $^\circ\text{C}$

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$
Thermal Resistance, Junction to Ambient Air (Note 3)	$R_{\theta JA}$	417	$^\circ\text{C/W}$

- Notes:
1. No purposefully added Lead
 2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 3. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on page 4 or on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

Electrical Characteristics:
NPN Transistor

 @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 4)						
Collector-Base Breakdown Voltage	V _{(BR)CBO}	50	—	—	V	I _C = 10μA, I _E = 0
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	45	—	—	V	I _C = 1.0mA, I _B = 0
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	6	—	—	V	I _E = 10μA, I _C = 0
Collector Cutoff Current	I _{CEX}	—	—	15	nA	V _{CE} = 50V, V _{EB(OFF)} = 3.0V
Base Cutoff Current (I _{BEX})	I _{BL}	—	—	15	nA	V _{CE} = 40V, V _{EB(OFF)} = 3.0V
Collector-Base Cut Off Current	I _{CBO}	—	—	15	nA	V _{CB} = 40V, I _E = 0
				5	μA	V _{CB} = 30V, T _A = 150°C
Collector-Emitter Cut Off Current, I _{O(OFF)}	I _{CEO}	—	—	50	nA	V _{CE} = 40V, I _B = 0
Emitter-Base Cut Off Current	I _{EBO}	—	—	50	nA	V _{EB} = 5V, I _C = 0
ON CHARACTERISTICS (Note 4)						
DC Current Gain	h _{fe}	180	—	—	—	V _{CE} = 5V, I _C = 100μA
		150	—	—	—	V _{CE} = 5V, I _C = 500μA
		220	—	—	—	V _{CE} = 5V, I _C = 1mA
		220	—	—	—	V _{CE} = 5V, I _C = 2mA
		150	—	—	—	V _{CE} = 5V, I _C = 5mA
		150	—	—	—	V _{CE} = 5V, I _C = 10mA
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	—	0.09	0.18	V	I _C = 10mA, I _B = 0.5mA
		—	0.2	0.4	V	I _C = 100mA, I _B = 5mA
Base-Emitter Turn-On Voltage	V _{BE(ON)}	647	657	667	mV	V _{CE} = 5V, I _C = 2mA
Base-Emitter Saturation Voltage	V _{BE(SAT)}	—	—	0.8	V	I _C = 10mA, I _B = 0.5mA
		—	—	0.9	V	I _C = 100mA, I _B = 5mA
SMALL SIGNAL CHARACTERISTICS						
Output Capacitance	C _{OBO}	—	3	—	pF	V _{CB} = 5.0V, f = 1.0 MHz, I _E = 0
Input Impedance	h _{ie}	—	4.5	—	KΩ	V _{CE} = 5.0V, I _C = 2mA, f = 1.0KHz
Voltage Feedback Ratio	h _{re}	—	2	—	x 10E-4	
Small Signal Current Gain	h _{fe}	—	200	—	—	
Output Admittance	h _{oe}	—	30	—	μS	
Current Gain-Bandwidth Product	f _T	100	—	—	MHz	V _{CE} = 20V, I _C = 10 mA, f = 100 MHz
Noise Figure	NF	—	—	10	dB	V _{CE} = 5V, I _C = 100μA, R _S = 1KΩ, f = 1kHz

Notes: 4. Short duration pulse test used to minimize self-heating effect.






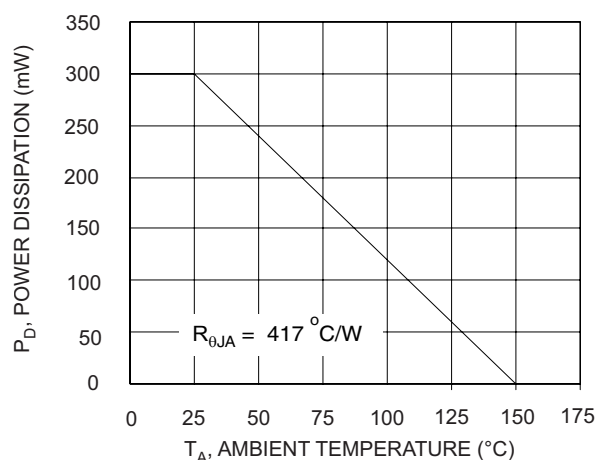
Typical Characteristics


Fig. 3 Max Power Dissipation vs Ambient Temperature

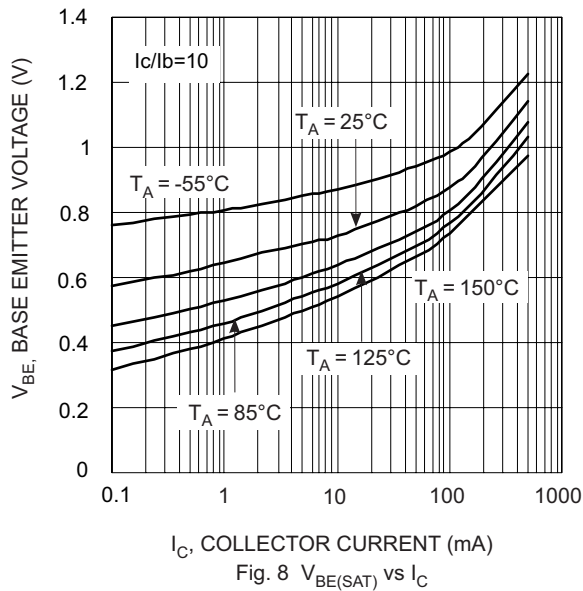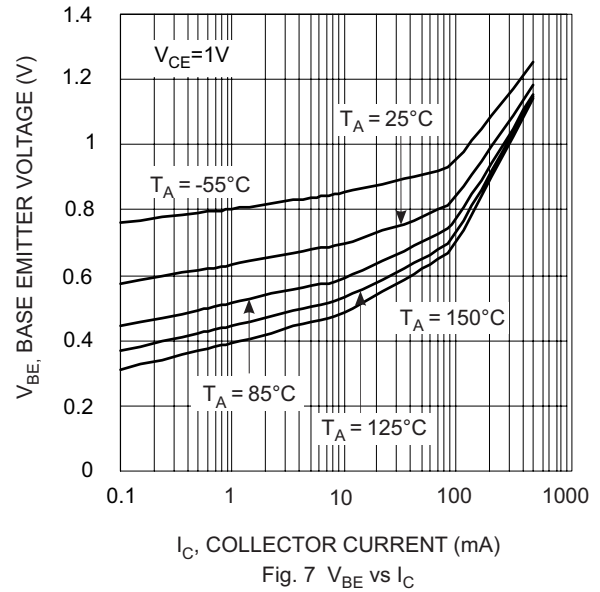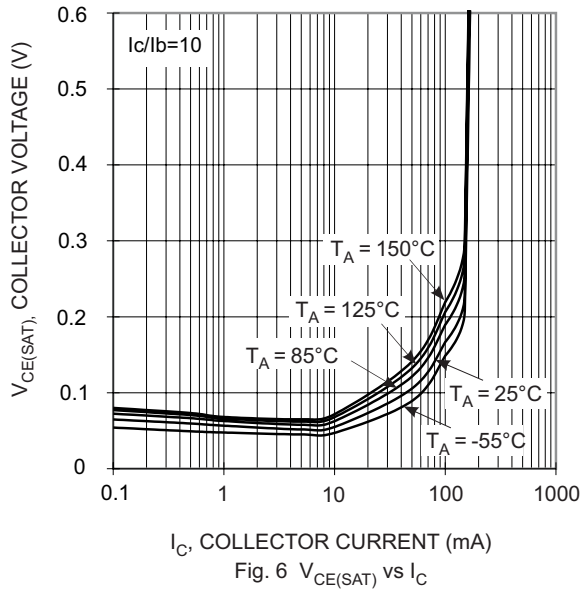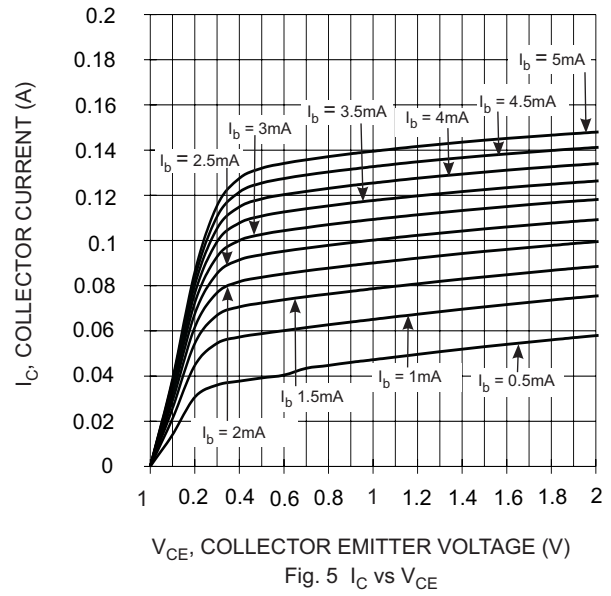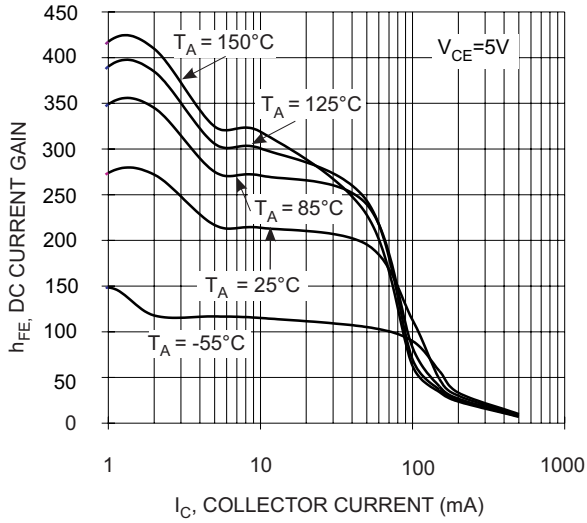

Ordering Information (Note 4)

Device	Packaging	Shipping
BC847BLD-7	SOT-23	3000/Tape & Reel

Notes: 4. For Packaging Details, please see below or go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information




Fig. 9

KLD = Product Type Marking Code
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

Year	2006	2007	2008	2009	2010	2011	2012
Code	T	U	V	W	X	Y	Z

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

Mechanical Details

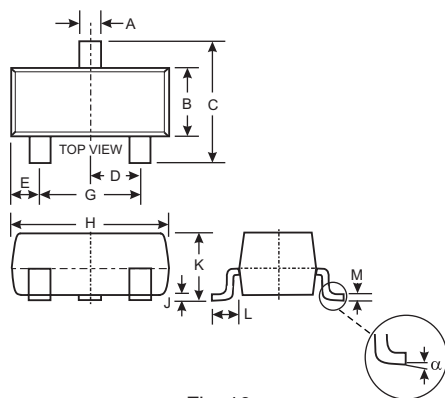


Fig. 10

SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.085	0.180
α	0°	8°
All Dimensions in mm		

Suggested Pad Layout: (Based on IPC-SM-782)

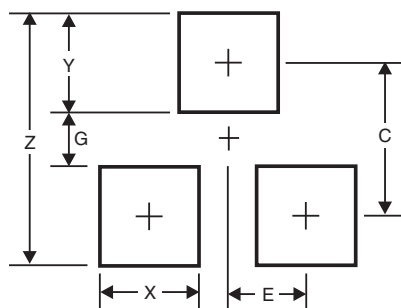


Fig. 11

Figure 11 Dimensions	SOT-23
Z	3.4
G	0.7
X	0.9
Y	1.4
C	2.0
E	0.9
All Dimensions in mm	

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.