Ordering number:EN1392A

PNP/NPN Epitaxial Planar Silicon Transistors

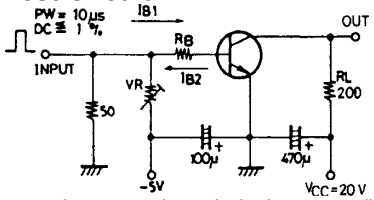
2SA1339/2SC3393

High-Speed Switching Applications

Features

- Very small-sized package permitting sets to be small-sized, slim.
- High breakdown voltage : V_{CEO}=(–)50V.
- Complementary pair transistor having large current capacity and high f_T.
- Adoption of FBET process.

Switching Time Test Circuit



(For PNP, the polarity is reversed)

Unit (resistance : Ω, capacitance : F)

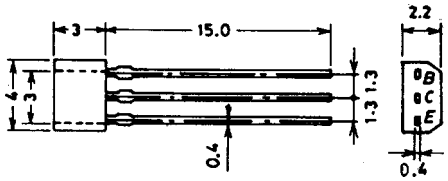
( ) : 2SA1339

Package Dimensions

unit:mm

2033

[2SA1339/2SC3393]



B : Base
C : Collector
E : Emitter

SANYO : SPA

Specifications

Absolute Maximum Ratings at Ta = 25˚C

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		(–)60	V
Collector-to-Emitter Voltage	V_{CEO}		(–)50	V
Emitter-to-Base Voltage	V_{EBO}		(–)5	V
Collector Current	I_C		(–)500	mA
Collector Current (Pulse)	I_{CP}		(–)800	mA
Collector Dissipation	P_C		300	mW
Junction Temperature	Tj		150	˚C
Storage Temperature	Tstg		–55 to +150	˚C

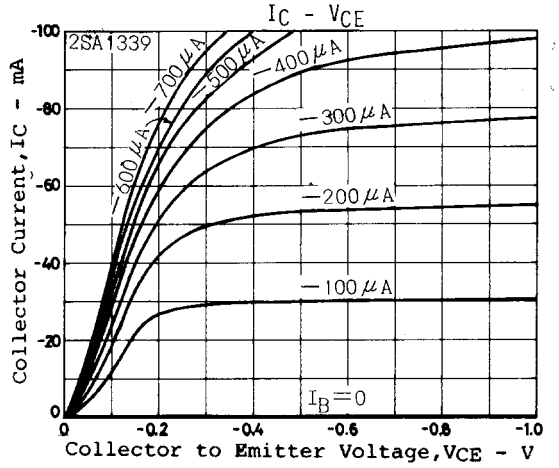
Electrical Characteristics at Ta = 25˚C

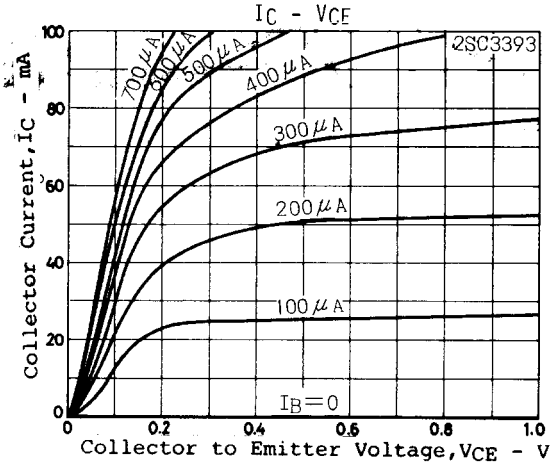
Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	V_{CB}=(–)40V, I_E=0			(–)0.1	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}=(–)4V, I_C=0			(–)0.1	μA
DC Current Gain	h_{FE}	V_{CE}=(–)5V, I_C=(–)10mA	100*		560*	
Gain-Bandwidth Product	f_T	V_{CE}=(–)10V, I_C=(–)50mA		300 (200)		MHz
Common Base Output Capacitance	C_{ob}	V_{CB}=(–)10V, f=1MHz		3.7 (5.6)		pF
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=(–)100mA, I_B=(–)10mA		0.1 (0.15)	0.3 (0.4)	V
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C=(–)100mA, I_B=(–)10mA		0.8	1.2	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C=(–)10μA, I_E=0	(–)60			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=(–)100μA, R_{BE}=∞	(–)50			V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E=(–)10μA, I_C=∞	(–)5			V
Turn-ON Time	t_{on}	V_{CC}=20V I_C=10I_{B1}=–10I_{B2}=100mA		70(70)		ns
Storage Time	t_{stg}			400 (400)		ns
Fall Time	t_f			70(50)		ns

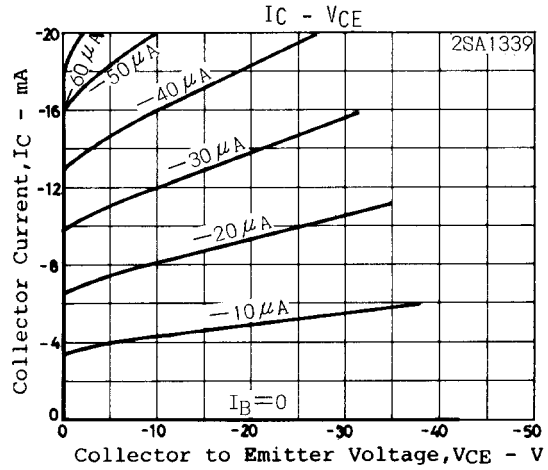
* : The 2SA1339/2SC3393 are classified by 10mA h_{FE} as follows :

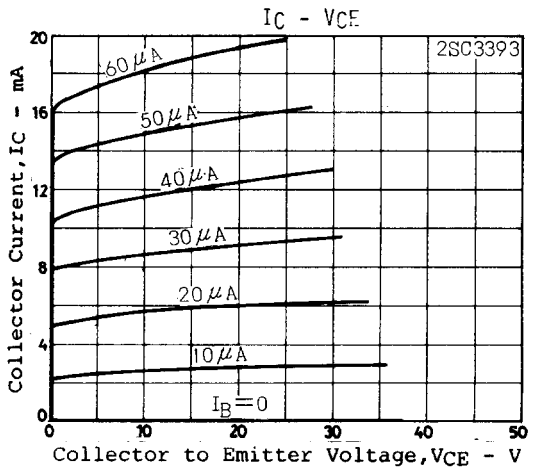
100	R	200	140	T	280	200	S	400	280	U	560

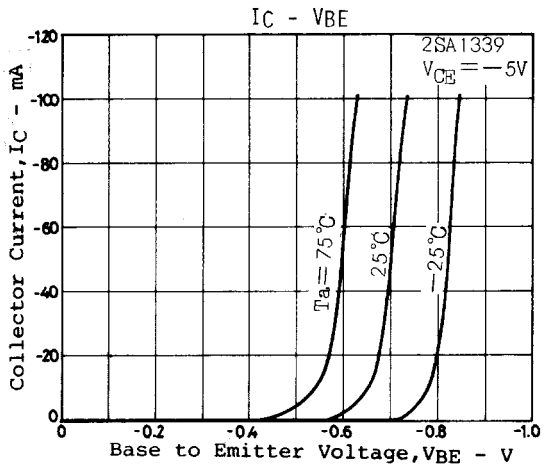
SANYO Electric Co.,Ltd. Semiconductor Bussiness Headquaters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

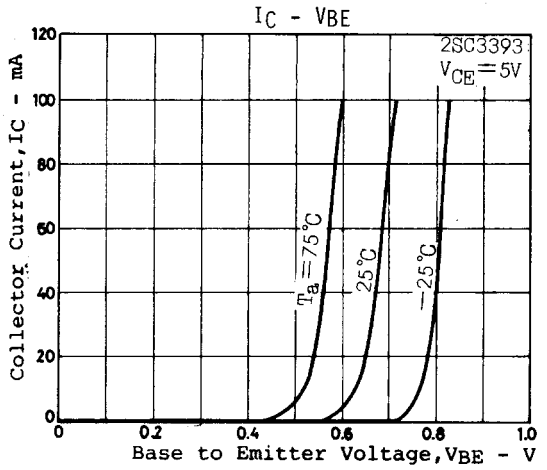

IC - VCE
2SA1339
−700μA
−600μA
−500μA
−400μA
−300μA
−200μA
−100μA
IB=0
Collector Current,IC - mA
Collector to Emitter Voltage,VCE - V

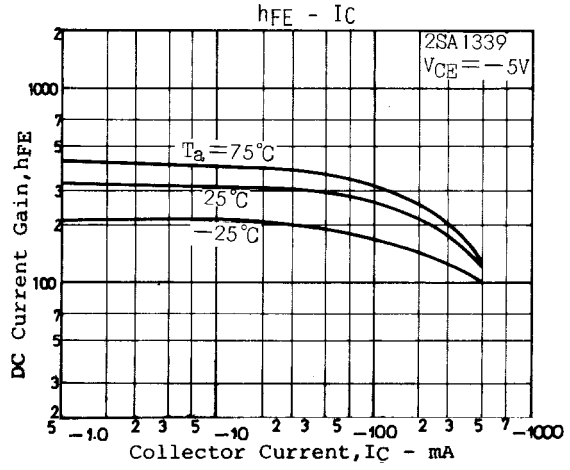

IC - VCE
2SC3393
700μA
600μA
500μA
400μA
300μA
200μA
100μA
IB=0
Collector Current,IC - mA
Collector to Emitter Voltage,VCE - V

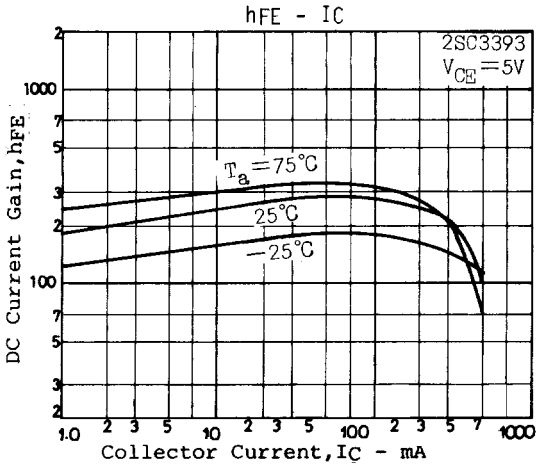

IC - VCE
2SA1339
−60μA
−50μA
−40μA
−30μA
−20μA
−10μA
IB=0
Collector Current,IC - mA
Collector to Emitter Voltage,VCE - V

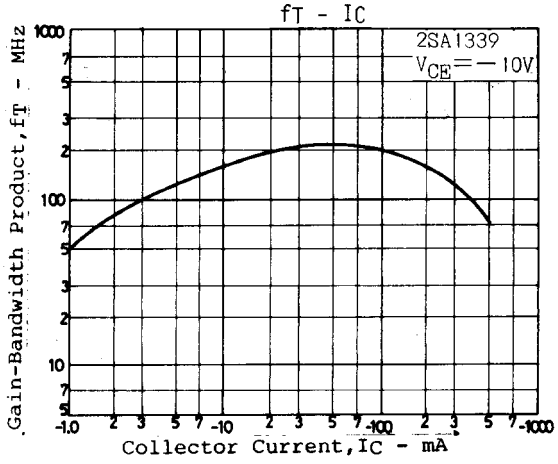

IC - VCE
2SC3393
60μA
50μA
40μA
30μA
20μA
10μA
IB=0
Collector Current,IC - mA
Collector to Emitter Voltage,VCE - V

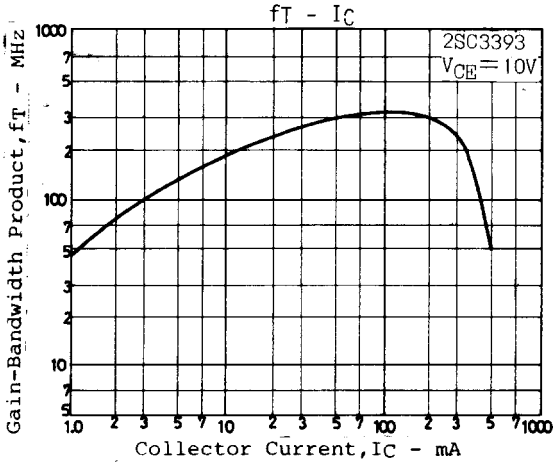

IC - VBE
2SA1339
VCE=−5V
Ta=75°C
25°C
−25°C
Collector Current,IC - mA
Base to Emitter Voltage,VBE - V

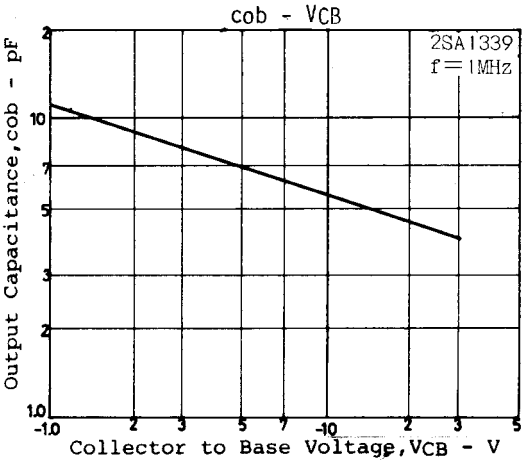

IC - VBE
2SC3393
VCE=5V
Ta=75°C
25°C
−25°C
Collector Current,IC - mA
Base to Emitter Voltage,VBE - V

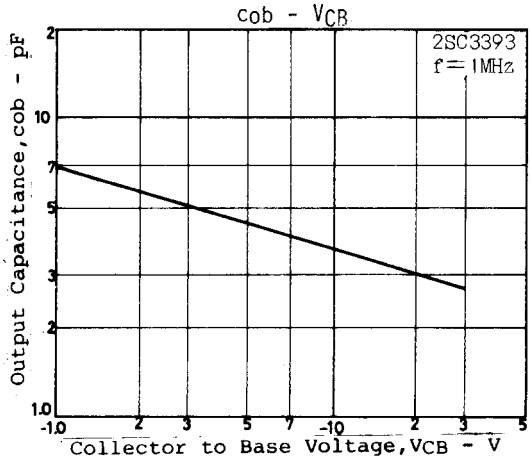

hFE - IC
2SA1339
VCE=−5V
Ta=75°C
25°C
−25°C
DC Current Gain,hFE
Collector Current,IC - mA

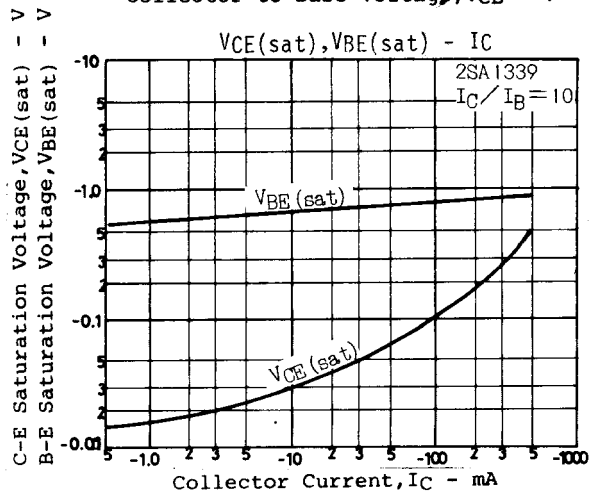

hFE - IC
2SC3393
VCE=5V
Ta=75°C
25°C
−25°C
DC Current Gain,hFE
Collector Current,IC - mA

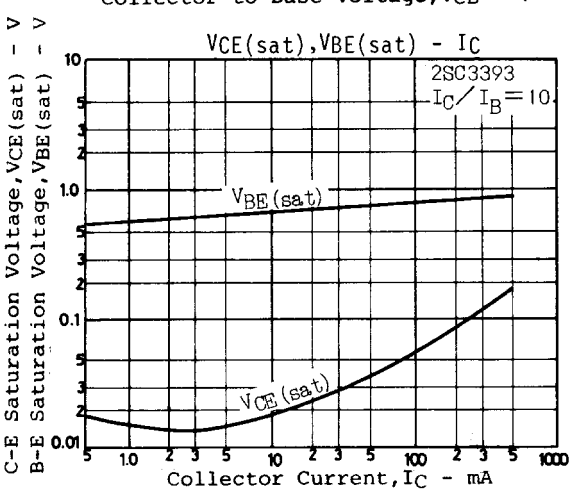

fT - IC
2SA1339
VCE=−10V
Gain-Bandwidth Product,fT - MHz
Collector Current,IC - mA

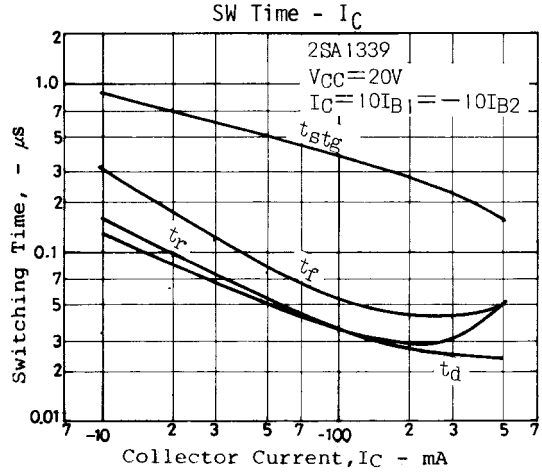

fT - IC
2SC3393
VCE=10V
Gain-Bandwidth Product,fT - MHz
Collector Current,IC - mA

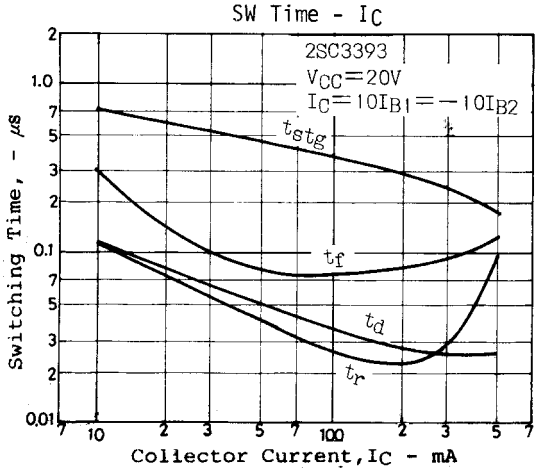

cob - VCB
2SA1339
f=1MHz
Output Capacitance,cob - pF
Collector to Base Voltage,VCB - V

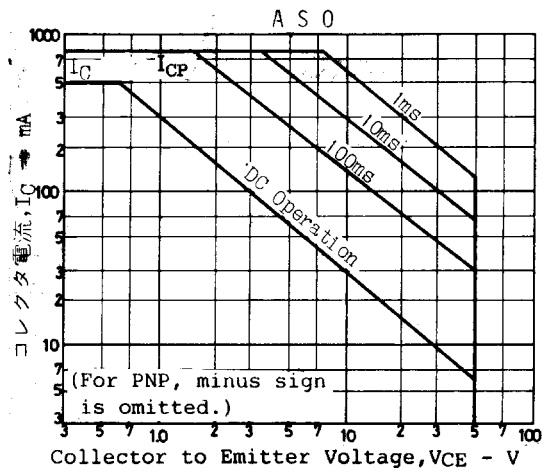

cob - VCB
2SC3393
f=1MHz
Output Capacitance,cob - pF
Collector to Base Voltage,VCB - V

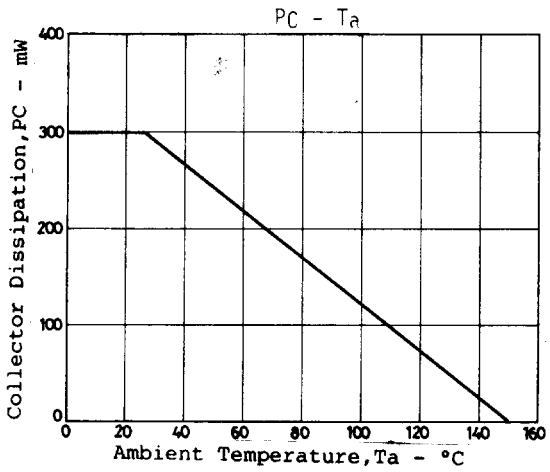

VCE(sat),VBE(sat) - IC
2SA1339
IC/IB=10
VBE(sat)
VCE(sat)
C-E Saturation Voltage,VCE(sat) - V
B-E Saturation Voltage,VBE(sat) - V
Collector Current,IC - mA


VCE(sat),VBE(sat) - IC
2SC3393
IC/IB=10
VBE(sat)
VCE(sat)
C-E Saturation Voltage,VCE(sat) - V
B-E Saturation Voltage,VBE(sat) - V
Collector Current,IC - mA


SW Time - IC
2SA1339
VCC=20V
IC=10IB1=−10IB2
tstg
tr
tf
td
Switching Time, - μs
Collector Current,IC - mA


SW Time - IC
2SC3393
VCC=20V
IC=10IB1=−10IB2
tstg
tf
td
tr
Switching Time, - μs
Collector Current,IC - mA





■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:
① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
② Not impose any responsibilty for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1998. Specifications and information herein are subject to change without notice.