

Shape

KPE-123



Shape


KPE-134




Model Number	KPE-123
Rated Frequency (Hz)	3,000 ± 500
Operating Voltage Range (VDC)	3 ~ 28
Current Consumption (mA)	Max. 8@12VDC
Sound Pressure Level (dB)	Min. 82dB@30cm@12VDC
Tone	Continuous
Operating Temperature (°C)	-30 ~ +85
Storage Temperature (°C)	-40 ~ +95
Weight (Gram)	3.4
Material	ABS UL-94 1/16" HB High Heat (Black)

Model Number	KPE-134
Rated Frequency (Hz)	3,600 ± 500
Operating Voltage Range (VDC)	3 ~ 20
Current Consumption (mA)	Max. 12@12VDC
Sound Pressure Level (dB)	Min. 85dB@30cm@12VDC
Tone	Continuous
Operating Temperature (°C)	-30 ~ +85
Storage Temperature (°C)	-40 ~ +95
Weight (Gram)	1.3
Material	ABS UL-94 1/16" HB High Heat (Black)

Dimension

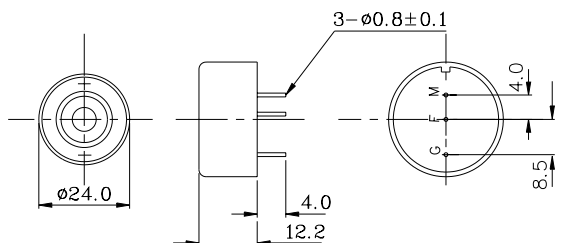


The current consumption and the sound pressure level are measured by using the recommended driving circuit shown in the right.




Tol : ±0.5 Unit : mm

Dimension

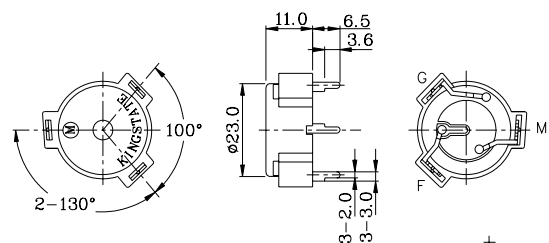


The current consumption and the sound pressure level are measured by using the recommended driving circuit shown in the right.



Tol : ±0.5 Unit : mm

Characteristic

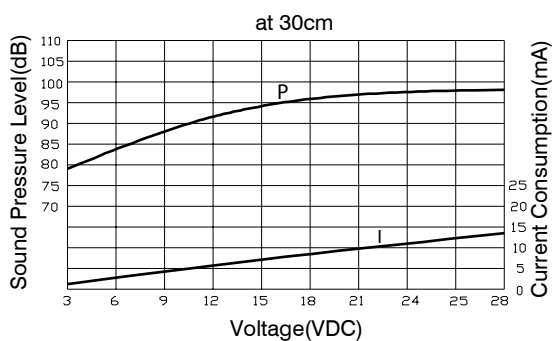

Characteristic

