KPSA56-101 HIGH EFFICIENCY RED


Features

- ●0.56 INCH DIGIT HEIGHT.
- ●LOW CURRENT OPERATION.
- ●EXCELLENT CHARACTER APPEARANCE.
- ●I.C. COMPATIBLE.
- ●MECHANICALLY RUGGED.
- ●GRAY FACE,WHITE SEGMENT.
- ●PACKAGE : 800PCS / REEL.

Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

Package Dimensions& Internal Circuit Diagram

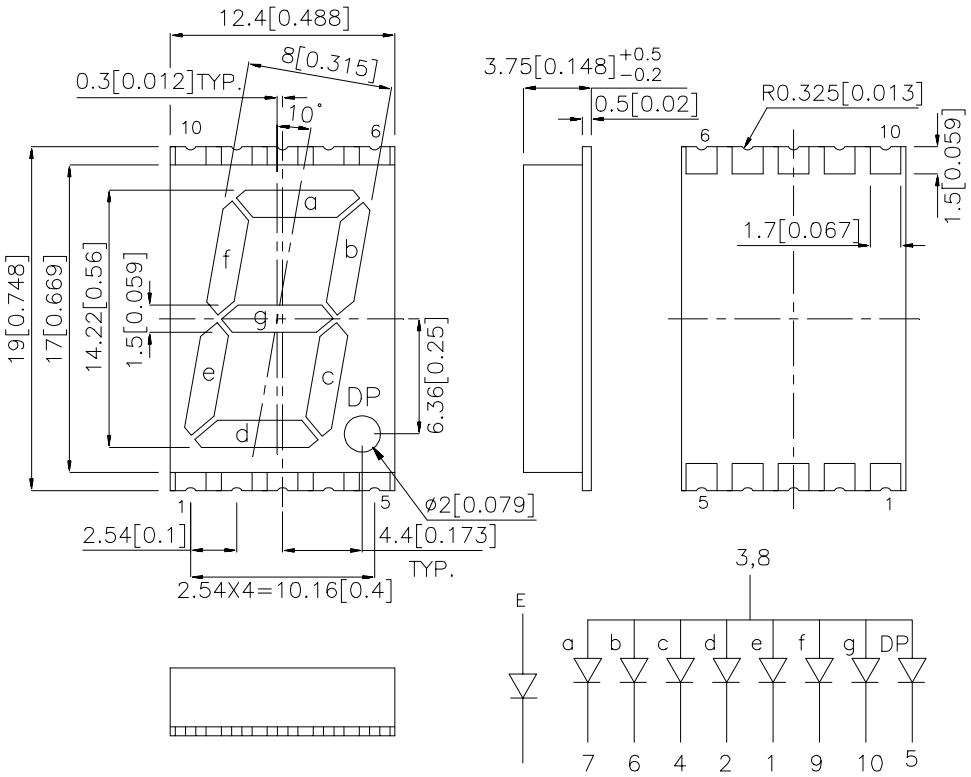

Notes:
1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01") unless otherwise noted.
2. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (ucd) @ 10 mA		Description
			Min.	Typ.	
KPSA56-101	HIGH EFFICIENCY RED (GaAsP/GaP)	WHITE DIFFUSED	1200	7400	Common Anode,Rt. Hand Decimal


Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	High Efficiency Red	627		nm	I_F=20mA
λD	Dominate Wavelength	High Efficiency Red	625		nm	I_F=20mA
Δλ1/2	Spectral Line Half-width	High Efficiency Red	45		nm	I_F=20mA
C	Capacitance	High Efficiency Red	15		pF	V_F=0V;f=1MHz
V_F	Forward Voltage	High Efficiency Red	2.0	2.5	V	I_F=20mA
I_R	Reverse Current	High Efficiency Red		10	uA	V_R = 5V

Absolute Maximum Ratings at T_A=25°C


Parameter	High Efficiency Red	Units
Power dissipation	105	mW
DC Forward Current	30	mA
Peak Forward Current [1]	160	mA
Reverse Voltage	5	V
Operating/Storage Temperature	-40°C To +85°C	

Note:
1. 1/10 Duty Cycle, 0.1ms Pulse Width.

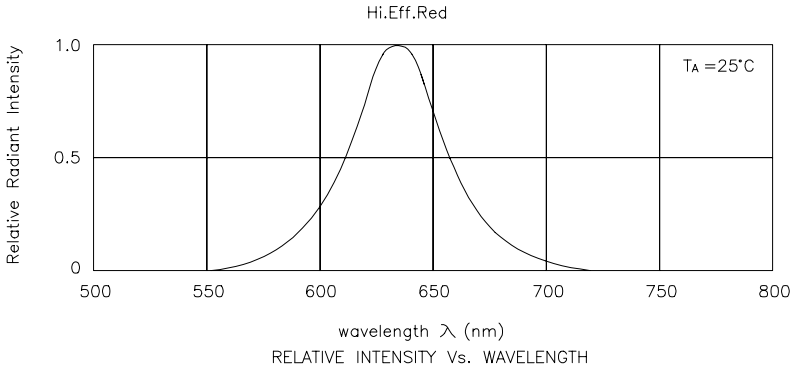


RELATIVE INTENSITY Vs. WAVELENGTH


High Efficiency Red KPSA56-101




FORWARD CURRENT Vs.
FORWARD VOLTAGE



LUMINOUS INTENSITY Vs.
FORWARD CURRENT



FORWARD CURRENT
DERATING CURVE

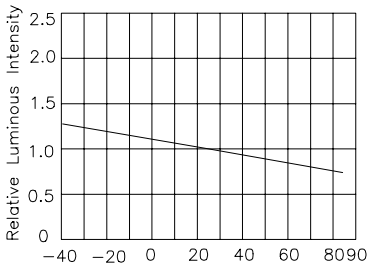


LUMINOUS INTENSITY Vs.
AMBIENT TEMPERATURE


KPSA56-101

SMT Reflow Soldering Instruction

Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and second soldering process.

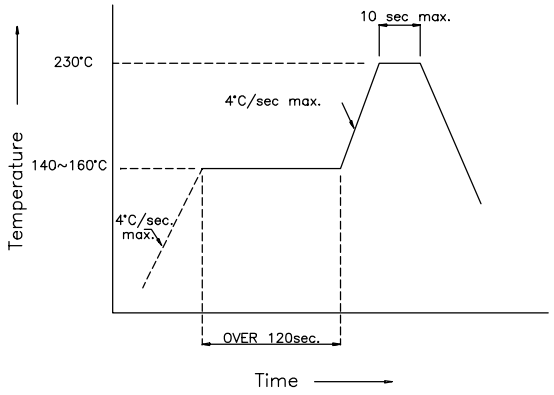

Recommended Soldering Pattern (Units : mm)

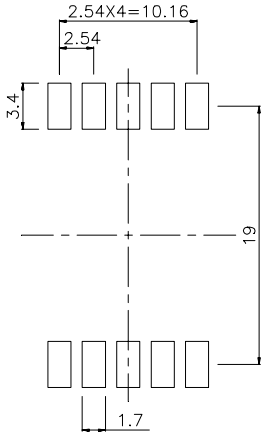

Tape Specification (Units : mm)

