



LD2982 SERIES

VERY LOW DROP AND LOW NOISE VOLTAGE REGULATOR WITH INHIBIT FUNCTION

- VERY LOW DROPOUT VOLTAGE (120mV AT 50mA AND 7mV AT 1mA LOAD)
- VERY LOW QUIESCENT CURRENT (375 μ A TYP. AT 50mA LOAD AND 75 μ A AT 1mA)
- OUTPUT CURRENT UP TO 50mA
- LOGIC CONTROLLED ELECTRONIC SHUTDOWN
- OUTPUT VOLTAGE OF 1.8, 2.5, 2.8, 3, 3.1, 3.2, 3.3, 3.5, 3.6, 3.8, 4, 4.7, 5V
- INTERNAL CURRENT AND THERMAL LIMIT
- AVAILABLE IN $\pm 1\%$ TOLERANCE (AT 25°C, A VERSION)
- SUPPLY VOLTAGE REJECTION: 45dB (TYP)
- ONLY 1mF FOR STABILITY
- LOW OUTPUT NOISE VOLTAGE 30mVrms
- SMALLEST PACKAGE SOT23-5L
- TEMPERATURE RANGE: -40°C TO 125°C

DESCRIPTION

The LD2982 is a 50mA fixed output voltage regulator. The ultra low drop voltage and the low quiescent current make them particularly suitable for low noise, low power applications, and in battery powered systems. In sleep mode




SOT23-5L

quiescent current is less than 1mA when INHIBIT pin is pulled low. Shutdown Logic Control Function is available on pin 3 (TTL compatible). This means that when the device is used as local regulator, it is possible to put a part of the board in standby, decreasing the total power consumption.

AN internal capacitor connected to the bypass pin C_{OUT} 30mVrms.

Typical application are in cellular phone, palmtop/laptop computer, personal digital assistant (PDA), personal stereo, camcorder and camera.

SCHEMATIC DIAGRAM

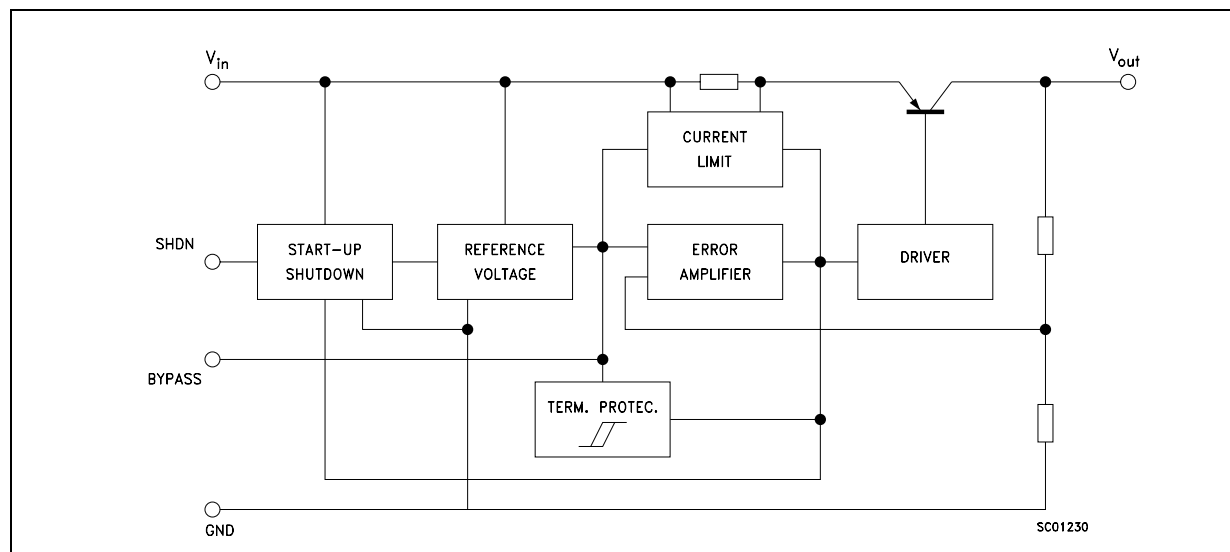

LD2982 SERIES

ABSOLUTE MAXIMUM RATINGS


Symbol	Parameter	Value	Unit
V_I	DC Input Voltage	16	V
V_{INH}	INHIBIT Input Voltage	16	V
I_O	Output Current	Internally limited	
P_{tot}	Power Dissipation	Internally limited	
T_{stg}	Storage Temperature Range	-65 to +150	°C
T_{op}	Operating Junction Temperature Range	-40 to +125	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

THERMAL DATA

Symbol	Parameter	SOT23-5L	Unit
$R_{thj-case}$	Thermal Resistance Junction-case	81	°C/W

CONNECTION DIAGRAM (top view)

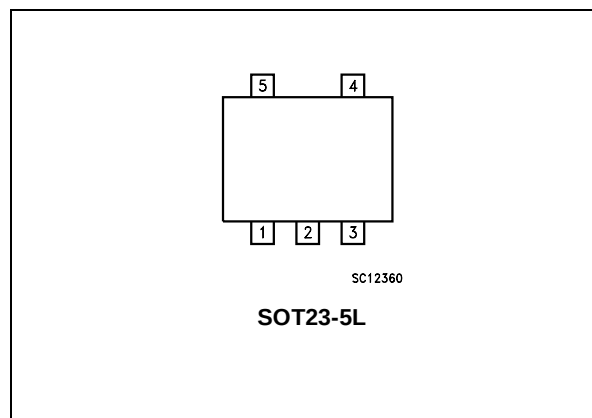

PIN DESCRIPTION

Pin N°	Symbol	Name and Function
1	IN	Input Port
2	GND	Ground Pin
3	INHIBIT	Control switch ON/OFF. Inhibit is not internally pulled-up; it cannot be left floating. Disable the device when connected to GND or to a positive voltage less than 0.18V
4	Bypass	Bypass Pin: Capacitor to be connected to GND in order to improve the thermal noise performances.
5	OUT	Output Port

ORDERING CODES

A VERSION	B VERSION	OUTPUT VOLTAGES
LD2982AM18R	LD2982BM18R	1.8V
LD2982AM25R	LD2982BM25R	2.5V
LD2982AM28R	LD2982BM28R	2.8V
LD2982AM30R	LD2982BM30R	3.0V
LD2982AM31R	LD2982BM31R	3.1V
LD2982AM32R	LD2982BM32R	3.2V
LD2982AM33R	LD2982BM33R	3.3V
LD2982AM35R	LD2982BM35R	3.5V
LD2982AM36R	LD2982BM36R	3.6V
LD2982AM38R	LD2982BM38R	3.8V
LD2982AM40R	LD2982BM40R	4.0V
LD2982AM47R	LD2982BM47R	4.7V
LD2982AM50R	LD2982BM50R	5.0V

ELECTRICAL CHARACTERISTICS FOR LD2982A ($T_J = 25^\circ\text{C}$, $V_{IN}=V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}$, $V_{SHDN}=2\text{V}$, $C_I = 1\mu\text{F}$, $C_O = 1\mu\text{F}$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$V_I = 2.8\text{V}$	1.782	1.8	1.818	V
		$I_O = 1$ to 50mA	1.773		1.827	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	1.764		1.836	V
V_O	Output Voltage	$V_I = 3.5\text{V}$	2.475	2.5	2.525	V
		$I_O = 1$ to 50mA	2.462		2.537	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.45		2.55	V
V_O	Output Voltage	$V_I = 3.8\text{V}$	2.772	2.8	2.828	V
		$I_O = 1$ to 50mA	2.758		2.842	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.744		2.856	V
V_O	Output Voltage	$V_I = 4.0\text{V}$	2.970	3.0	3.030	V
		$I_O = 1$ to 50mA	2.955		3.045	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.94		3.06	V
V_O	Output Voltage	$V_I = 4.1\text{V}$	3.069	3.1	3.131	V
		$I_O = 1$ to 50mA	3.053		3.146	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.038		3.162	V
V_O	Output Voltage	$V_I = 4.2\text{V}$	3.168	3.2	3.232	V
		$I_O = 1$ to 50mA	3.152		3.248	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.136		3.264	V
V_O	Output Voltage	$V_I = 4.3\text{V}$	3.267	3.3	3.333	V
		$I_O = 1$ to 50mA	3.250		3.349	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.234		3.366	V
V_O	Output Voltage	$V_I = 4.5\text{V}$	3.465	3.5	3.535	V
		$I_O = 1$ to 50mA	3.447		3.552	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.43		3.57	V
V_O	Output Voltage	$V_I = 4.6\text{V}$	3.564	3.6	3.636	V
		$I_O = 1$ to 50mA	3.546		3.654	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.528		3.672	V
V_O	Output Voltage	$V_I = 4.8\text{V}$	3.762	3.8	3.838	V
		$I_O = 1$ to 50mA	3.743		3.857	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.724		3.876	V
V_O	Output Voltage	$V_I = 5.0\text{V}$	3.96	4	4.04	V
		$I_O = 1$ to 50mA	3.94		4.06	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.92		4.08	V
V_O	Output Voltage	$V_I = 5.7\text{V}$	4.653	4.7	4.747	V
		$I_O = 1$ to 50mA	4.629		4.77	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	4.606		4.794	V
V_O	Output Voltage	$V_I = 6.0\text{V}$	4.95	5	5.05	V
		$I_O = 1$ to 50mA	4.925		5.075	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	4.9		5.1	V
I_{SC}	Short Circuit Current	$R_L = 0$		150		mA

LD2982 SERIES

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$\Delta V_O/\Delta V_I$	Line Regulation	$V_I = V_O + 1V$ to 16V, $I_O = 1mA$		0.003	0.014	%/ V_I
		$V_I = V_O + 1V$ to 16V, $I_O = 1mA$ $T_J = -40$ to $125^\circ C$			0.032	%/ V_I
V_d	Dropout Voltage	$I_O = 0$		1	3	mV
		$I_O = 0$ $T_J = -40$ to $125^\circ C$			5	mV
		$I_O = 1mA$		7	10	mV
		$I_O = 1mA$ $T_J = -40$ to $125^\circ C$			15	mV
		$I_O = 10mA$		40	60	mV
		$I_O = 10mA$ $T_J = -40$ to $125^\circ C$			90	mV
		$I_O = 50mA$		120	150	mV
		$I_O = 50mA$ $T_J = -40$ to $125^\circ C$			225	mV
I_d	Quiescent Current	$I_O = 0$		65	95	μA
		$I_O = 0$ $T_J = -40$ to $125^\circ C$			125	μA
		$I_O = 1mA$		80	110	μA
		$I_O = 1mA$ $T_J = -40$ to $125^\circ C$			170	μA
		$I_O = 10mA$		140	220	μA
		$I_O = 10mA$ $T_J = -40$ to $125^\circ C$			460	μA
		$I_O = 50mA$		375	600	μA
		$I_O = 50mA$ $T_J = -40$ to $125^\circ C$			1200	μA
		OFF MODE $V_{INH} < 0.18V$		0		μA
		OFF MODE $V_{INH} < 0.18V$ $T_J = -40$ to $125^\circ C$			1	μA
SVR	Supply Voltage Rejection	$C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$ $f = 1KHz$		45		dB
V_{IL}	Control Input Logic Low	$T_J = -40$ to $125^\circ C$			0.15	V
V_{IH}	Control Input Logic High	$T_J = -40$ to $125^\circ C$	2			V
I_{INH}	Control Input Current	$T_J = -40$ to $125^\circ C$ $V_{SHDN} = 5V$		5	15	μA
		$T_J = -40$ to $125^\circ C$ $V_{SHDN} = 0V$		0	-1	μA
eN	Output Noise Voltage	$B = 300Hz$ to $50KHz$ $C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$		30		μV

ELECTRICAL CHARACTERISTICS FOR LD2982B ($T_J = 25^\circ\text{C}$, $V_{IN}=V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}$, $V_{SHDN}=2\text{V}$, $C_I = 1\mu\text{F}$, $C_O = 1\mu\text{F}$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_O	Output Voltage	$V_I = 2.8\text{V}$	1.773	1.8	1.827	V
		$I_O = 1$ to 50mA	1.764		1.836	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	1.737		1.863	V
V_O	Output Voltage	$V_I = 3.5\text{V}$	2.462	2.5	2.537	V
		$I_O = 1$ to 50mA	2.45		2.55	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.412		2.587	V
V_O	Output Voltage	$V_I = 3.8\text{V}$	2.758	2.8	2.842	V
		$I_O = 1$ to 50mA	2.744		2.856	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.702		2.898	V
V_O	Output Voltage	$V_I = 4.0\text{V}$	2.955	3.0	3.045	V
		$I_O = 1$ to 50mA	2.94		3.06	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.895		3.105	V
V_O	Output Voltage	$V_I = 4.1\text{V}$	3.053	3.1	3.146	V
		$I_O = 1$ to 50mA	3.038		3.162	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	2.991		3.208	V
V_O	Output Voltage	$V_I = 4.2\text{V}$	3.152	3.2	3.248	V
		$I_O = 1$ to 50mA	3.136		3.264	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.088		3.312	V
V_O	Output Voltage	$V_I = 4.3\text{V}$	3.250	3.3	3.349	V
		$I_O = 1$ to 50mA	3.234		3.366	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.184		3.415	V
V_O	Output Voltage	$V_I = 4.5\text{V}$	3.447	3.5	3.552	V
		$I_O = 1$ to 50mA	3.430		3.370	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.377		3.662	V
V_O	Output Voltage	$V_I = 4.6\text{V}$	3.546	3.6	3.654	V
		$I_O = 1$ to 50mA	3.528		3.672	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.474		3.726	V
V_O	Output Voltage	$V_I = 4.8\text{V}$	3.743	3.8	3.857	V
		$I_O = 1$ to 50mA	3.724		3.876	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.667		3.933	V
V_O	Output Voltage	$V_I = 5.0\text{V}$	3.94	4	4.06	V
		$I_O = 1$ to 50mA	3.92		4.08	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	3.86		4.14	V
V_O	Output Voltage	$V_I = 5.7\text{V}$	4.629	4.7	4.77	V
		$I_O = 1$ to 50mA	4.606		4.794	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	4.535		4.864	V
V_O	Output Voltage	$V_I = 6.0\text{V}$	4.925	5	5.075	V
		$I_O = 1$ to 50mA	4.9		5.1	V
		$I_O = 1$ to 50mA $T_J = -40$ to 125°C	4.825		5.175	V
I_{SC}	Short Circuit Current	$R_L = 0$		400		mA

LD2982 SERIES

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$\Delta V_O/\Delta V_I$	Line Regulation	$V_I = V_O + 1V$ to 16V, $I_O = 1mA$		0.003	0.014	%/ V_I
		$V_I = V_O + 1V$ to 16V, $I_O = 1mA$ $T_J = -40$ to $125^\circ C$			0.032	%/ V_I
V_d	Dropout Voltage	$I_O = 0$		1	3	mV
		$I_O = 0$ $T_J = -40$ to $125^\circ C$			5	mV
		$I_O = 1mA$		7	10	mV
		$I_O = 1mA$ $T_J = -40$ to $125^\circ C$			15	mV
		$I_O = 10mA$		40	60	mV
		$I_O = 10mA$ $T_J = -40$ to $125^\circ C$			90	mV
		$I_O = 50mA$		120	150	mV
		$I_O = 50mA$ $T_J = -40$ to $125^\circ C$			225	mV
I_d	Quiescent Current	$I_O = 0$		65	95	μA
		$I_O = 0$ $T_J = -40$ to $125^\circ C$			125	μA
		$I_O = 1mA$		80	110	μA
		$I_O = 1mA$ $T_J = -40$ to $125^\circ C$			170	μA
		$I_O = 10mA$		140	220	μA
		$I_O = 10mA$ $T_J = -40$ to $125^\circ C$			460	μA
		$I_O = 50mA$		375	600	μA
		$I_O = 50mA$ $T_J = -40$ to $125^\circ C$			1200	μA
		OFF MODE $V_{INH} < 0.18V$		0		μA
		OFF MODE $V_{INH} < 0.18V$ $T_J = -40$ to $125^\circ C$			1	μA
SVR	Supply Voltage Rejection	$C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$ $f = 1KHz$		45		dB
V_{IL}	Control Input Logic Low	$T_J = -40$ to $125^\circ C$			0.15	V
V_{IH}	Control Input Logic High	$T_J = -40$ to $125^\circ C$	2			V
I_{INH}	Control Input Current	$T_J = -40$ to $125^\circ C$ $V_{SHDN} = 5V$		5	15	μA
		$T_J = -40$ to $125^\circ C$ $V_{SHDN} = 0V$		0	-1	μA
eN	Output Noise Voltage	$B = 300Hz$ to $50KHz$ $C_{BYP} = 0.01\mu F$ $C_O = 10\mu F$		30		μV

TYPICAL CHARACTERISTICS (unless otherwise specified $T_j = 25^\circ\text{C}$, $C_I = 1\mu\text{F}$, $C_O = 2.2\mu\text{F}$, $C_{BYP} = 100\text{nF}$)

Figure 1 : Output Voltage vs Temperature

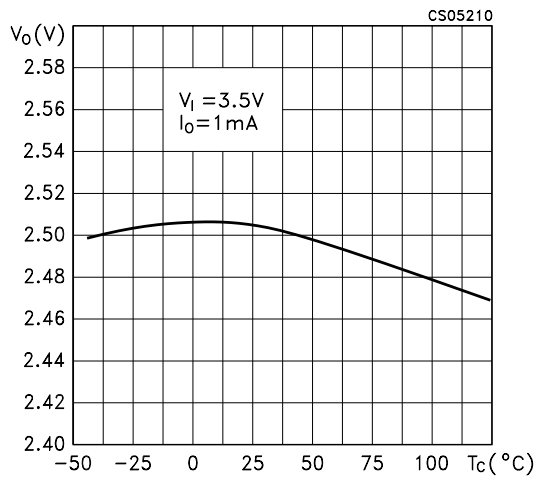


Figure 2 : Dropout Voltage vs Temperature

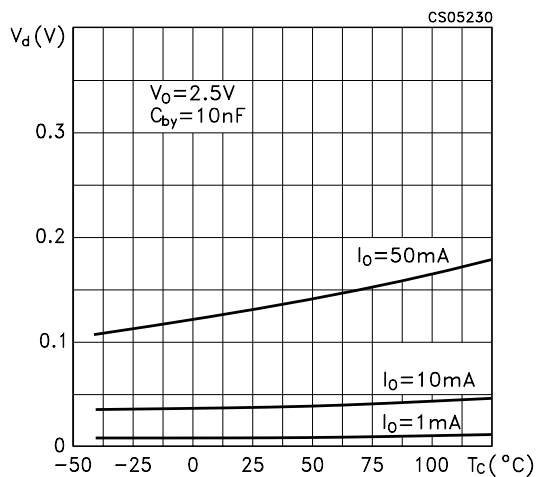


Figure 3 : Dropout Voltage vs Output Current

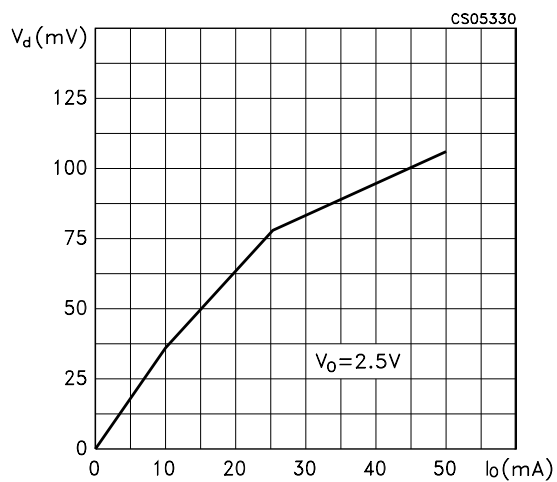


Figure 4 : Quiescent Current vs Load Current

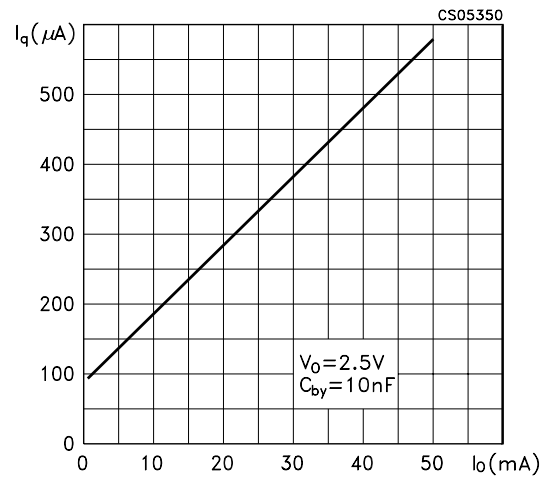


Figure 5 : Quiescent Current vs Temperature

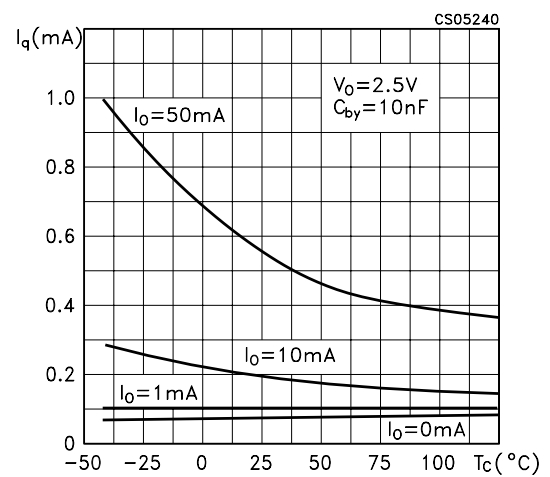


Figure 6 : Supply Voltage Rejection vs Temperature

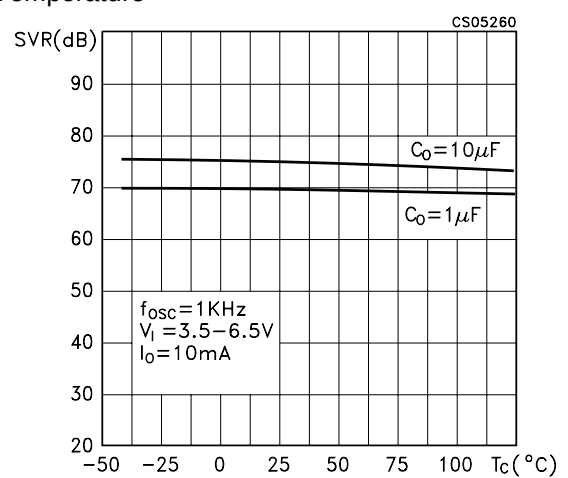


Figure 7 : Supply Voltage Rejection vs Output Current

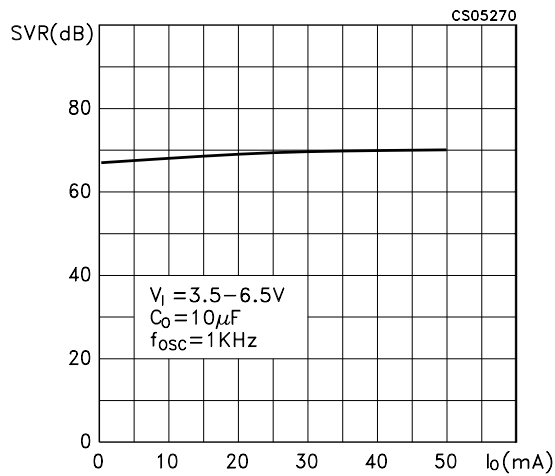


Figure 8 : Supply Voltage Rejection vs Output Current

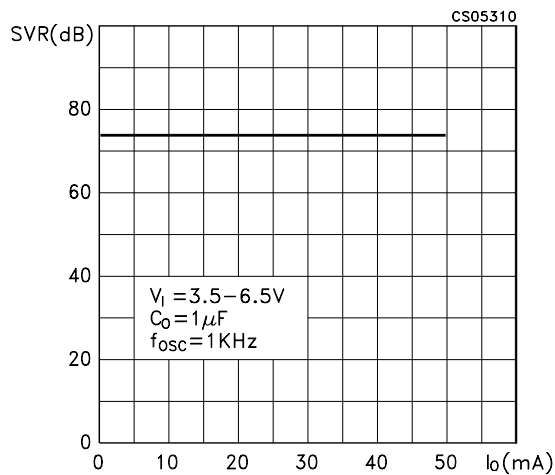


Figure 9 : Supply Voltage Rejection vs Frequency

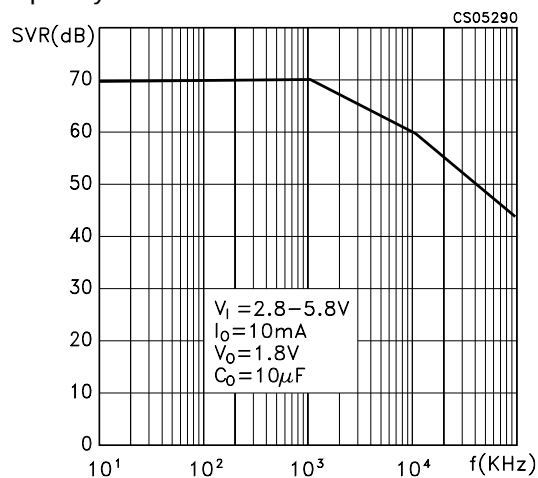


Figure 10 : Supply Voltage Rejection vs Frequency

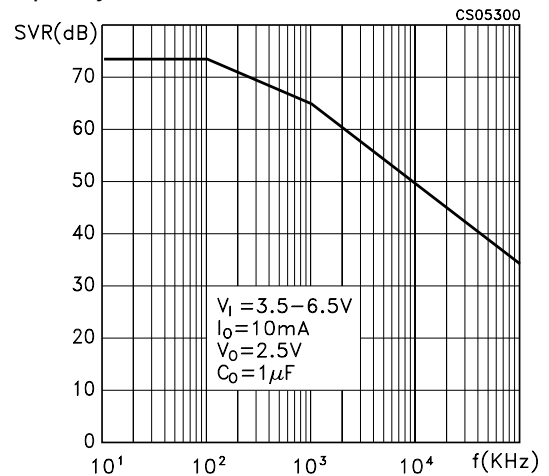


Figure 11 : Line Transient

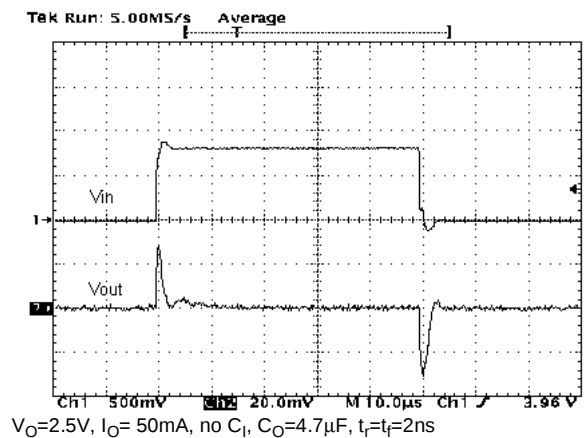


Figure 12 : Line Transient

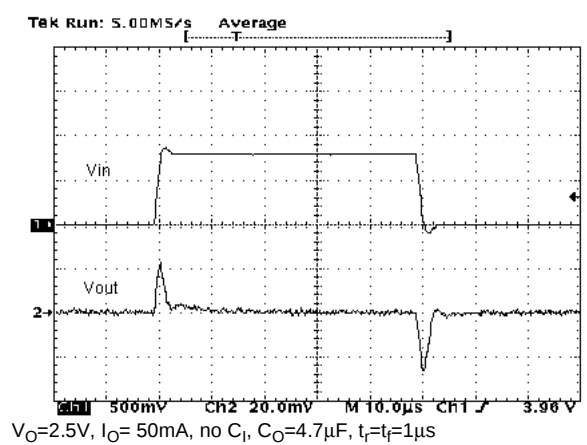


Figure 13 : Load Transient



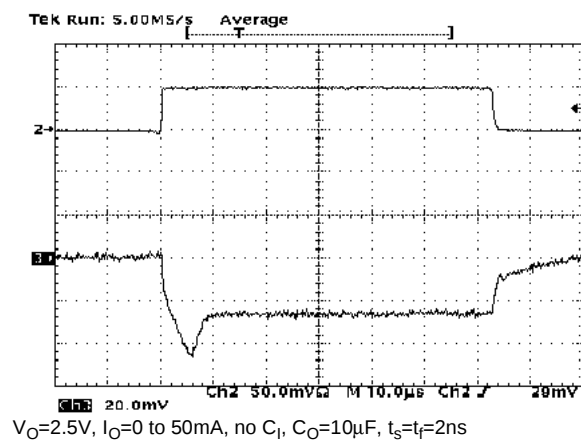


Figure 14 : Load Transient

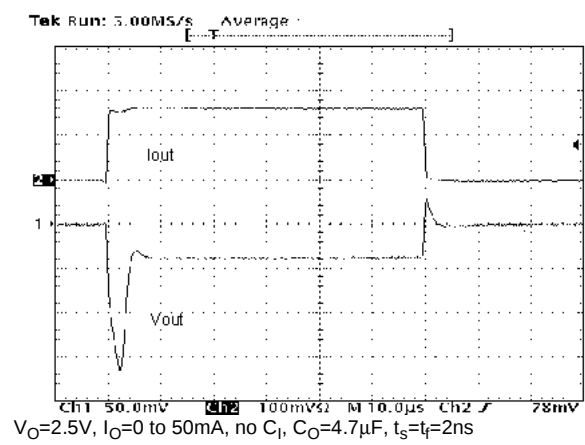


SOT23-5L MECHANICAL DATA

DIM.	mm.			mils		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	0.90		1.45	35.4		57.1
A1	0.00		0.15	0.0		5.9
A2	0.90		1.30	35.4		51.2
b	0.35		0.50	13.7		19.7
C	0.09		0.20	3.5		7.8
D	2.80		3.00	110.2		118.1
E	2.60		3.00	102.3		118.1
E1	1.50		1.75	59.0		68.8
e		0.95			37.4	
e1		1.9			74.8	
L	0.35		0.55	13.7		21.6

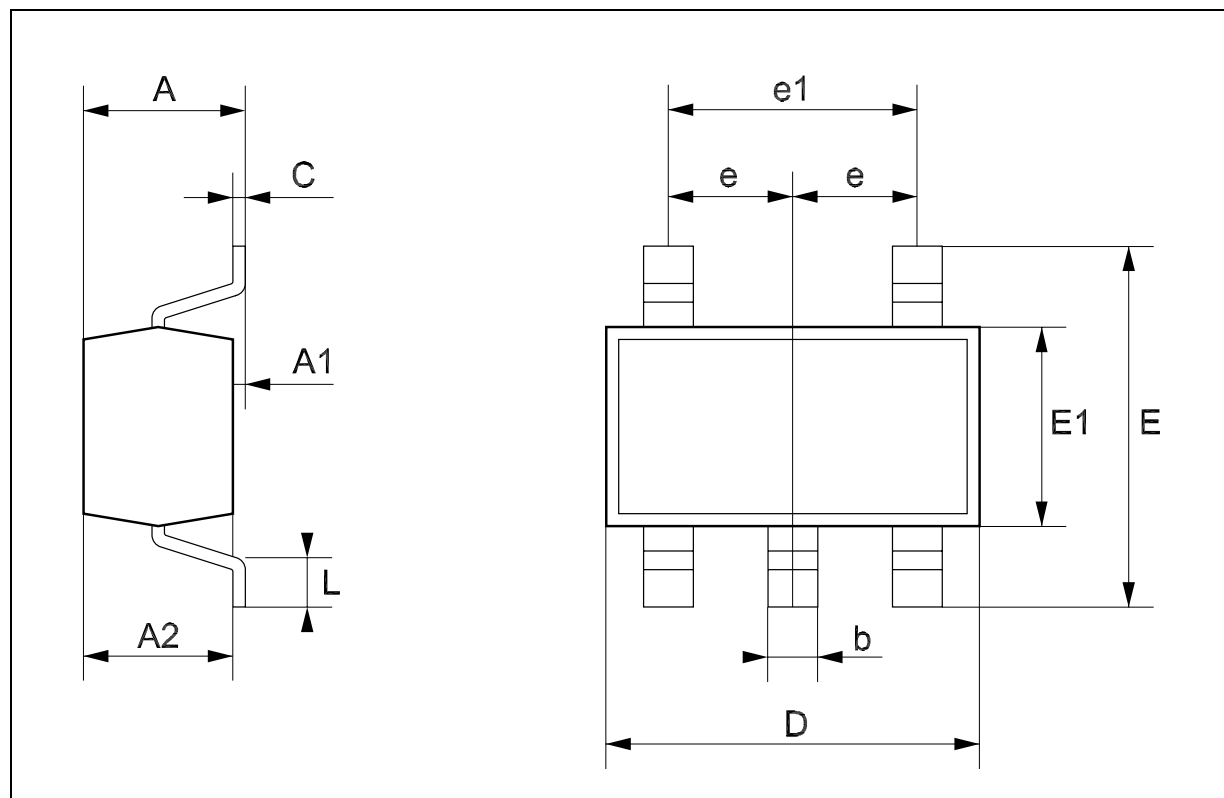

Tape & Reel SOT23-xL MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			180			7.086
C	12.8	13.0	13.2	0.504	0.512	0.519
D	20.2			0.795		
N	60			2.362		
T			14.4			0.567
Ao	3.13	3.23	3.33	0.123	0.127	0.131
Bo	3.07	3.17	3.27	0.120	0.124	0.128
Ko	1.27	1.37	1.47	0.050	0.054	0.058
Po	3.9	4.0	4.1	0.153	0.157	0.161
P	3.9	4.0	4.1	0.153	0.157	0.161

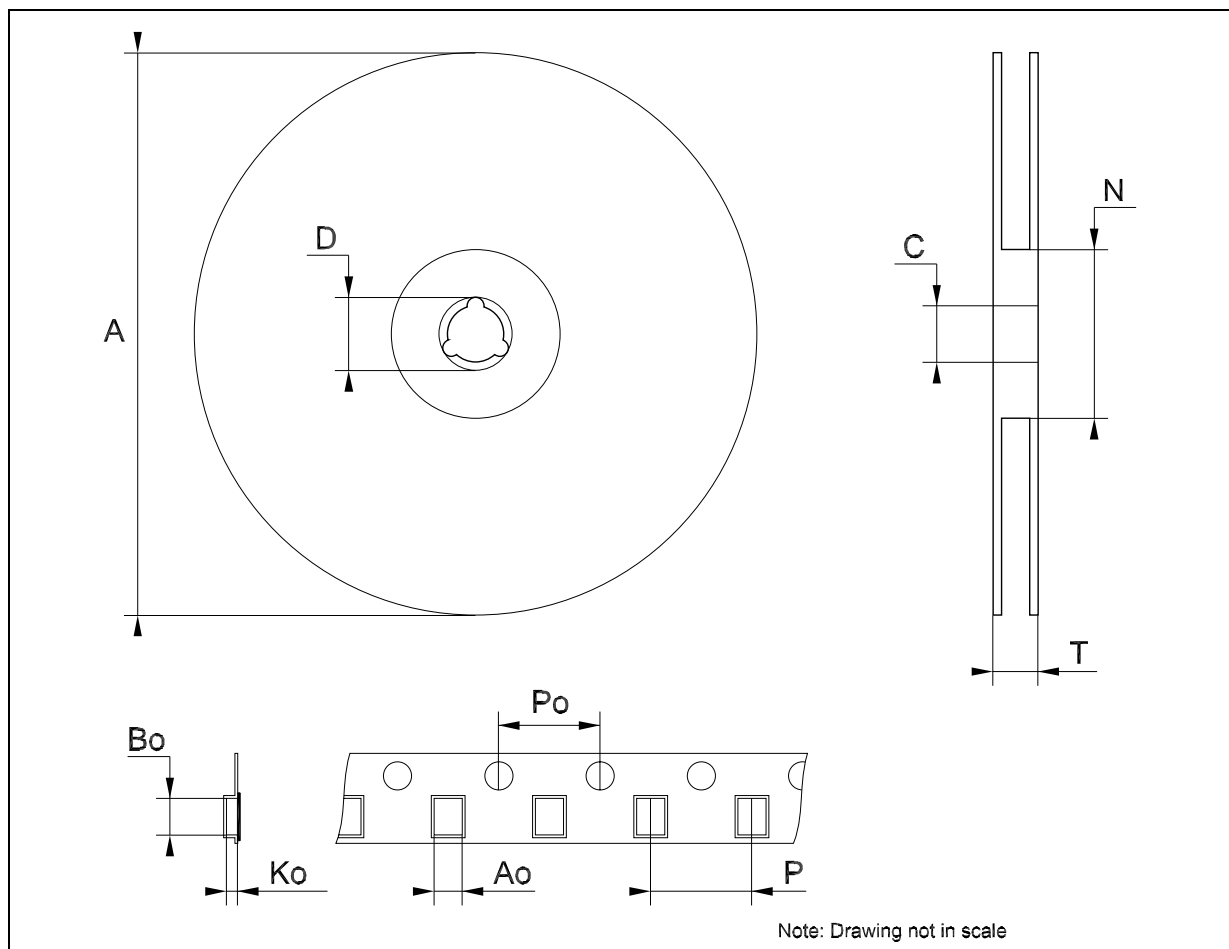

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>