


SPECIFICATIONS

Type:	Control
Phase:	Single
Frequency (Hz):	60
VA:	25 to 7500 VA (25, 50 , 100, 150, 200, 250, 350, 500, 750, 1000, 1500, 2000, 3000, 5000, 7500)
K Rating:	1
Reverse Connectable:	No
Winding Material:	Copper
Electrostatic Shielded:	No
Temperature Rise:	80°C (25 to 1000 VA) 100°C (1500 to 7500 VA)
Insulation System:	130°C (25 to 1000 VA) 155°C (1500 to 7500 VA)
Enclosure:	Open
Construction Style:	Open - Core & Coil
Mounting Type:	Base/Panel
Connection Type:	Screw Terminals
Cooling:	Air/Dry
UL Listed:	Yes
CSA Approved:	Yes
Other Agency Approvals:	CE Verified (up to and including 5000 VA)
Sound Level:	Less than 40 db
Warranty:	10 Years
Input Voltages Available:	600, 575, 550, 480, 240/480, 460, 230/460, 440, 220/440, 416, 400, 380, 208/416, 347/380, 347, 277, 240, 120/240, 230, 115/230, 220, 110/220, 208, 200, 130, 120, 115, 110
Output Voltages Available:	240, 120/240, 230, 115/230, 220, 110/220, 120, 115, 110, 48, 36, 32, 24, 16, 12 (3, 5, 9, 10, 15, Secondary available for 120/240V Primary only)



DIMENSIONAL DIAGRAM

All dimensions in inches.

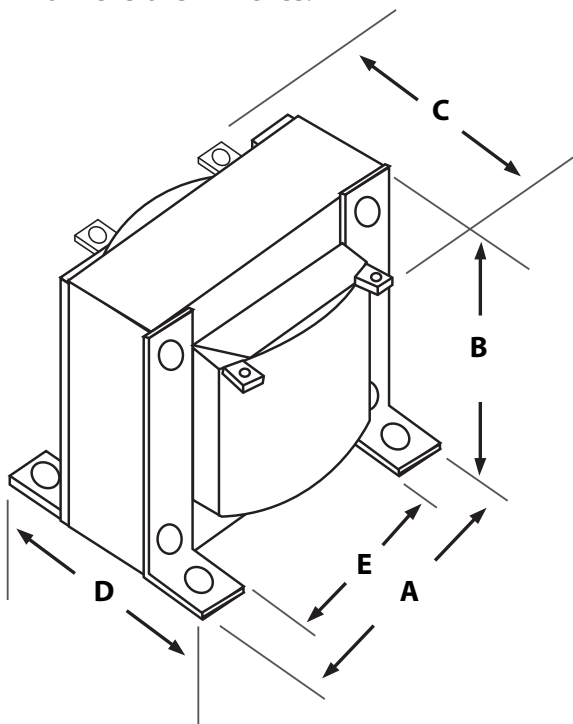

VA	A	B	C	D	E	Mounting Holes	Weight (lbs)
25	3	2.5	2.77	1.98	2.5	0.21 x 0.625	1.25
50	3	2.5	3	2.25	2.5	0.21 x 0.625	2.25
100	3	2.5	3.27	2.5	2.5	0.21 x 0.625	2.75
150	3.75	3.13	4.02	3	3.13	0.21 x 0.625	5.75
200	3.75	3.13	4.59	3.25	3.13	0.21 x 0.625	6
250	4.5	3.75	4.15	2.75	3.75	0.21 x 0.625	7.5
350	4.5	3.75	5.2	3.75	3.75	0.21 x 0.625	11
500	5.25	4.38	4.95	3.12	4.38	0.28 x 0.56	12.5
750	5.25	4.38	6	4.12	4.38	0.28 x 0.56	19
1000	5.25	4.38	6.7	5.12	4.38	0.28 x 0.56	25
1500	7.5	6.25	6.75	3.5	6.75	0.31 x 0.688	36
2000	7.5	6.25	7.75	4.5	6.75	0.31 x 0.688	39
3000	7.5	6.25	9.75	6.5	6.75	0.31 x 0.688	59
5000	9	8	9.75	6.5	8	0.31 x 0.688	91
7500	9	8	11.75	8.5	8	0.31 x 0.688	115

Note: All dimensions are +/- 0.06 in. except for dimension "C," which is +/- 0.25 in.