
Ultra Fast Recovery Rectifiers

UF860 – UF880

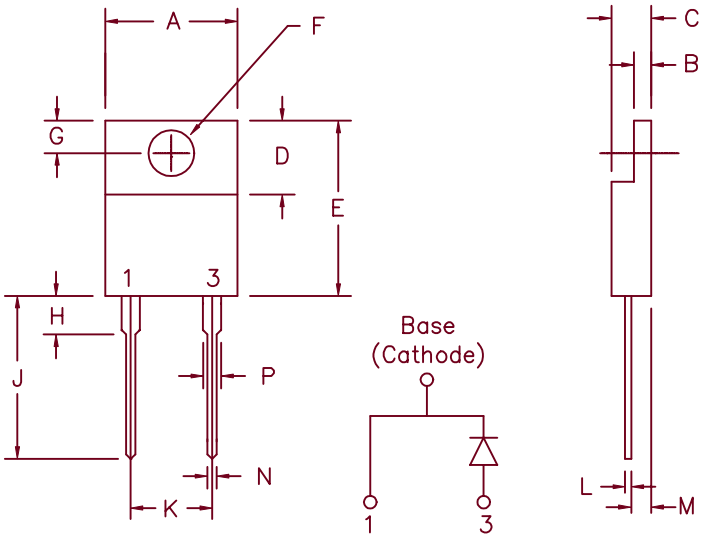

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.550	.650	13.97	16.51	
F	.139	.155	3.53	3.94	Dia.
G	.100	.120	2.54	3.05	
H	---	.250	---	6.35	
J	.500	.580	12.70	14.73	
K	.190	.210	4.83	5.33	
L	.014	.025	0.35	0.63	
M	.080	.115	2.03	2.92	
N	.028	.038	0.71	0.96	
P	.045	.055	1.14	1.40	

Similar to TO–220AC

Microsemi Catalog Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
UF860	600V	600V
UF870	700V	700V
UF880	800V	800V

- Ultra Fast Recovery Rectifier
- 175°C Junction Temperature
- 8 Amp current rating
- V_{RRM} 600 to 800 Volts
- trr 70ns maximum

Electrical Characteristics

Average Forward Current	$I_{F(AV)}$ 8 Amps	T_C = 157°C, Square wave, $R_{\theta JC}$ = 2.0°C/W
Maximum Surge Current	I_{FSM} 125 Amps	8.3ms, half sine, T_J = 175°C
Max. Peak Forward Voltage	V_{FM} 1.3 Volts	I_{FM} = 8A, T_J = 25°C*
Max. Peak Reverse Current	I_{RM} 10 μA	V_{RRM}, T_J = 25°C
Max. Reverse Recovery Time	t_{rr} 70 ns	1/2A, 1A, 1/4A, T_J = 25°C
Typical Junction Capacitance	C_J 30 pF	V_R = 10V, T_J = 25°C, f = 1MHz

*Pulse test: Pulse width 300 μsec. Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	TSTG	−55°C to + 175°C
Operating junction temp range	T_J	−55°C to + 175°C
Max thermal resistance	$R_{\theta JC}$	2.0°C/W junction to case
Mounting torque		10–15 inch pounds
Weight		0.06 ounces (1.8 grams) typical

COLORADO Microsemi
800 Hoyt Street
Broomfield, CO. 80020
PH: (303) 469–2161
FAX: (303) 466–3775
www.microsemi.com

7–27–00 Rev. 1

UF860 – UF880

Figure 1
Typical Forward Characteristics

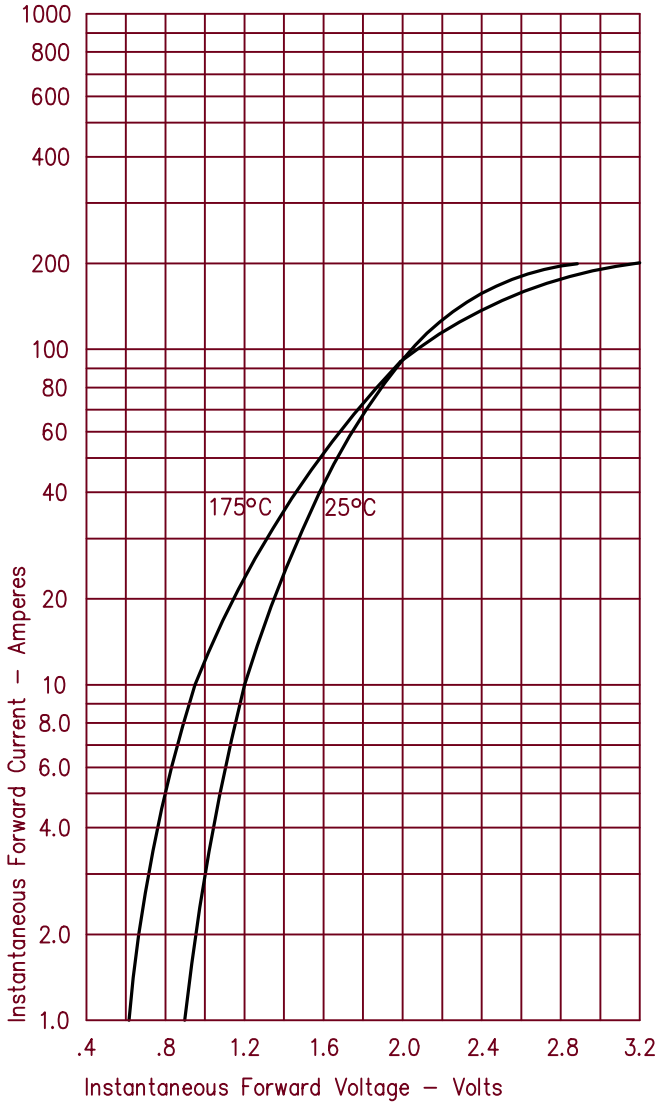


Figure 2
Typical Reverse Characteristics

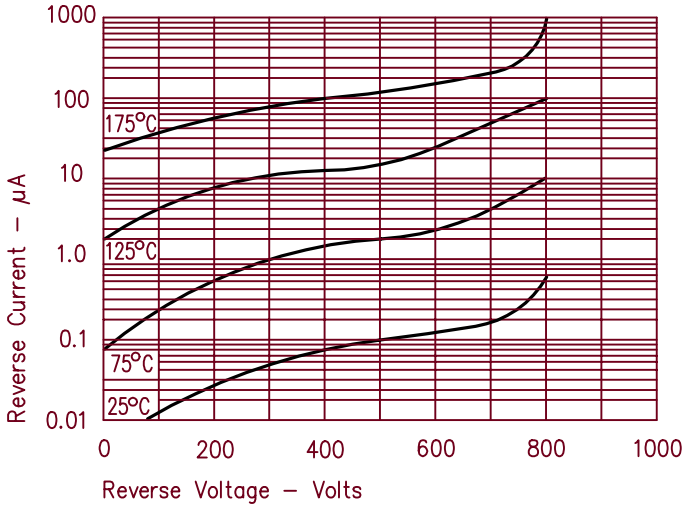


Figure 3
Typical Junction Capacitance

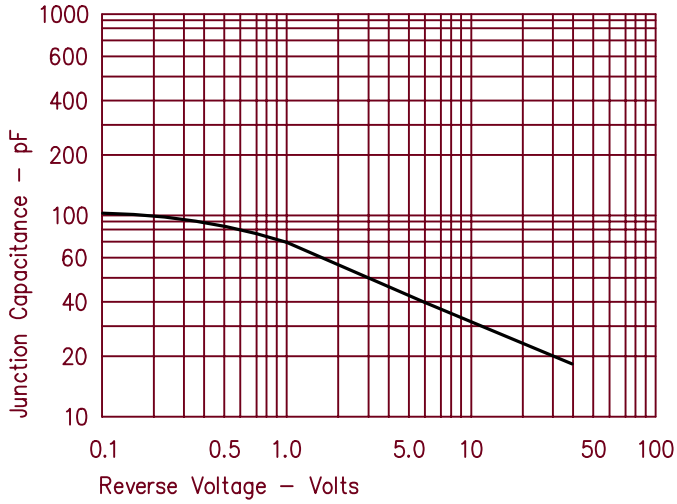


Figure 4
Forward Current Derating

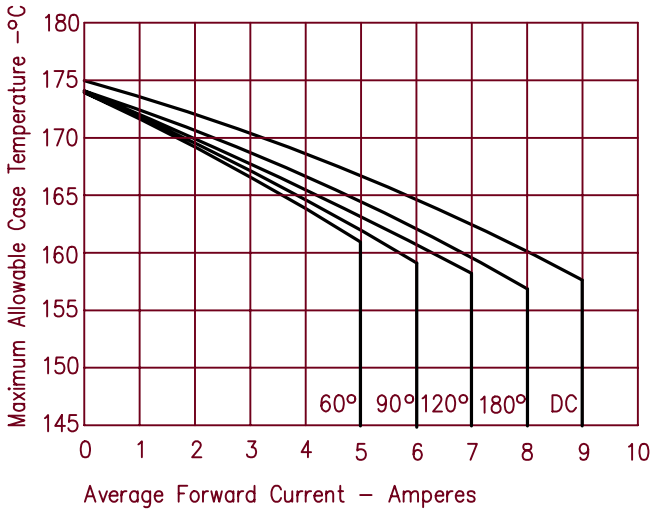


Figure 5
Maximum Forward Power Dissipation

