Kingbright

5x5mm SQUARE TOP LED LAMP

W503GDT GREEN


Features

- ●LOW POWER CONSUMPTION.
- ●WIDE VIEWING ANGLE.
- ●RELIABLE AND RUGGED.
- ●EXCELLENT UNIFORMITY OF LIGHT OUTPUT.
- ●IDEAL AS FLUSH MOUNTED PANEL INDICATORS.
- ●LONG LIFE - SOLID STATE RELIABILITY.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

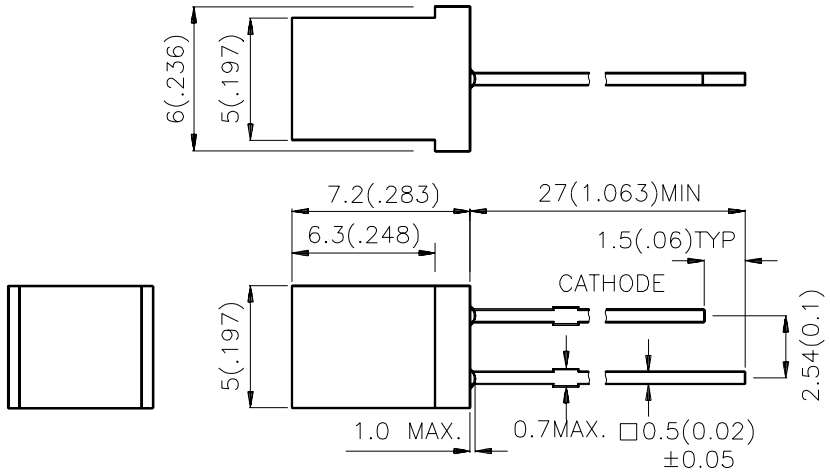

Notes:
1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25(0.01") unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Kingbright

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 10 mA		Viewing Angle
			Min.	Typ.	2θ1/2
W503GDT	GREEN (GaP)	GREEN DIFFUSED	1	3	110°

Note:
1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	I_F=20mA
λD	Dominate Wavelength	Green	568		nm	I_F=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	I_F=20mA
C	Capacitance	Green	15		pF	V_F=0V;f=1MHz
V_F	Forward Voltage	Green	2.2	2.5	V	I_F=20mA
I_R	Reverse Current	Green		10	uA	V_R = 5V

Absolute Maximum Ratings at T_A=25°C


Parameter	Green	Units
Power dissipation	105	mW
DC Forward Current	25	mA
Peak Forward Current [1]	140	mA
Reverse Voltage	5	V
Operating/Storage Temperature	-40°C To +85°C	
Lead Solder Temperature [2]	260°C For 5 Seconds	

Notes:
1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.

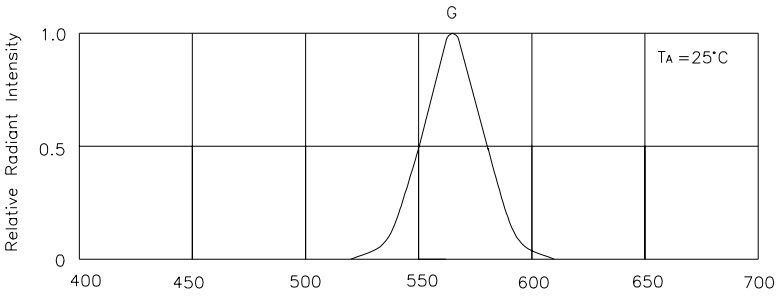


RELATIVE INTENSITY Vs. WAVELENGTH


Green W503GDT




FORWARD CURRENT Vs.
FORWARD VOLTAGE




LUMINOUS INTENSITY Vs.
FORWARD CURRENT



FORWARD CURRENT
DERATING CURVE

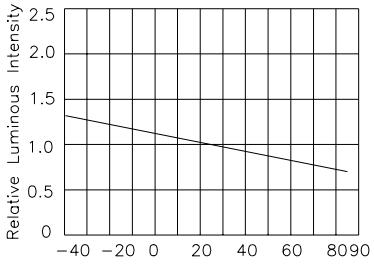

LUMINOUS INTENSITY Vs.
AMBIENT TEMPERATURE



SPATIAL DISTRIBUTION