




ITEM		MODEL	WYR1C0310/0505/103/201/5005D4
O U T P U T	Rated voltage		30/50/100/200/500VDC
	Voltage range		5~30/5~50/5~100/5~200/5~500VDC
	Rated load current		10/5/3/1/0.5A
	Contact voltage drop		2.0VDC
I N P U T	Maximum input voltage		32VDC
	Input voltage range		4~32VDC
	Input current		10 ±3(mA)
	Minimum operating voltage		3.0VDC
	Turn off voltage		1.4VDC
G E N E R A L	Dielectric withstand		1500VAC / rms / 1Min
	Insulation resistance		DC 500V / 100MΩ
	Response time		10ms
	Operating temperature		-10 ~ +60℃
	Storage temperature		-20 ~ +80℃
	Weight		20g

● Dimension

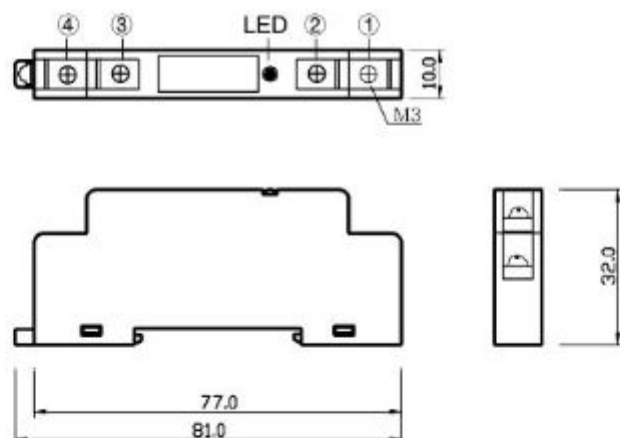


● Terminal



Input Ter : Max 6.2, Min 3
Output Ter : Max 6.2, Min 3

● Block Diagram

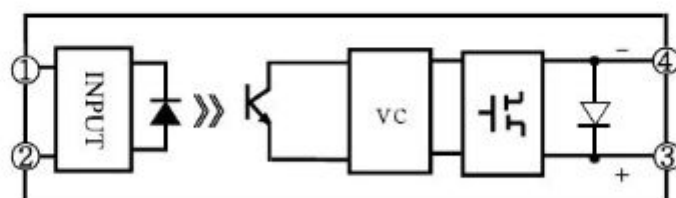

* VC : VOLTAGE CIRCUIT

● Application Circuit

