
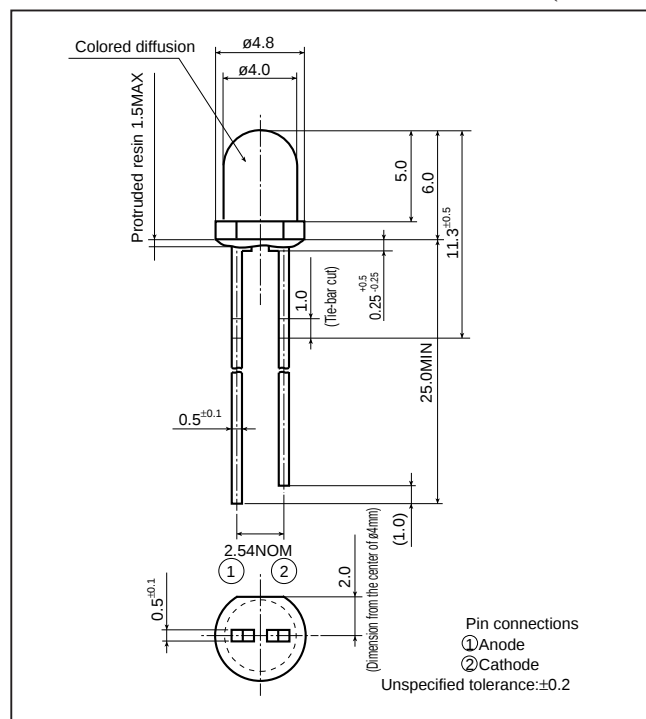


ø4mm, Cylinder Type, Colored Diffusion LED Lamps for Indicator

(Unit : mm)

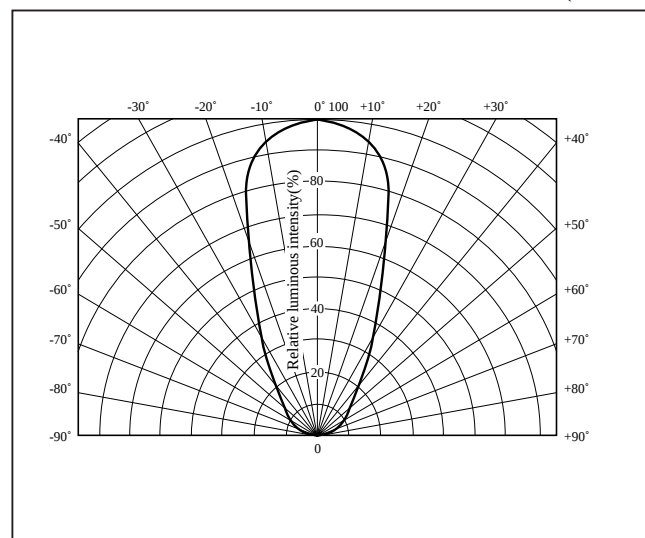

($T_a=25^\circ\text{C}$)

 $(T_a=25^\circ\text{C})$

Model No.	Radiation color	Radiation material	Power dissipation P (mW)	Forward current I _F (mA)	Peak forward current I _{FM} ^{*1} (mA)	Derating factor (mA/°C)		Reverse voltage V _R (V)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)	Soldering temperature T _{sol} ⁺² (°C)
						DC	Pulse				
GL4PR8	Red	GaP	23	10	50	0.13	0.67	5	-25 to +85	-25 to +100	260
GL4HD8	Red	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL4HS8	Sunset orange	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL4HY8	Yellow	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL4EG8	Yellow-green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL4KG8	Green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260

*2 5s or less(At the position of 1.6mm or more from the bottom face of resin package)

($T_a=25^\circ\text{C}$)

Lens type	Model No.	Forward voltage V _F (V)		Peak emission wavelength		Luminous intensity		Spectrum radiation bandwidth		Reverse current		Terminal capacitance		Page for characteristics diagrams
		TYP	MAX	λ_p (nm) TYP	I _F (mA)	I _V (mcd) TYP	I _F (mA)	$\Delta\lambda$ (nm) TYP	I _F (mA)	I _R (μ A) MAX	V _R (V)	C _t (pF) TYP	(MHz)	
Colored diffusion	GL4PR8	1.9	2.3	695	5	15	5	100	5	10	4	55	1	→
	GL4HD8	2.0	2.8	635	20	110	20	35	20	10	4	20	1	→
	GL4HS8	2.0	2.8	610	20	80	20	35	20	10	4	15	1	→
	GL4HY8	2.0	2.8	585	20	110	20	30	20	10	4	35	1	→
	GL4EG8	2.1	2.8	565	20	100	20	30	20	10	4	35	1	→
	GL4KG8	2.1	2.8	555	20	30	20	25	20	10	4	40	1	→


(Notice) ● In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

(Internet) ● Data for sharp's optoelectronic/power device is provided for internet.(Address <http://www.sharp.co.jp/ecg/>)


LED Lamp Characteristics Diagrams

PR series


Forward Current Derating Curve

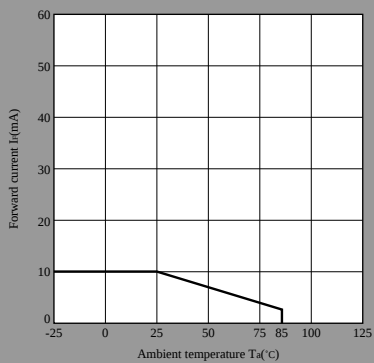


Forward Current vs. Forward Voltage(Note)

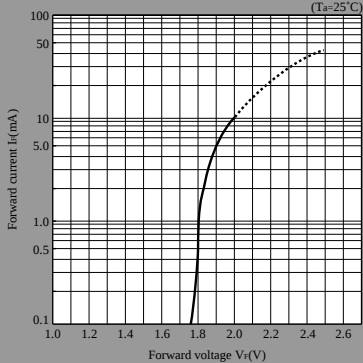


Luminous Intensity vs. Ambient Temperature(Note)

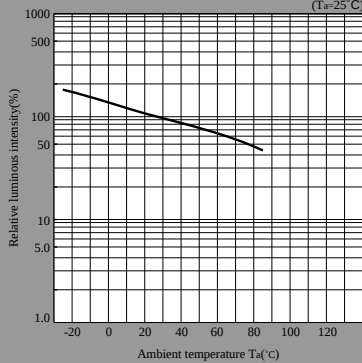


Peak Forward Current Derating Curve

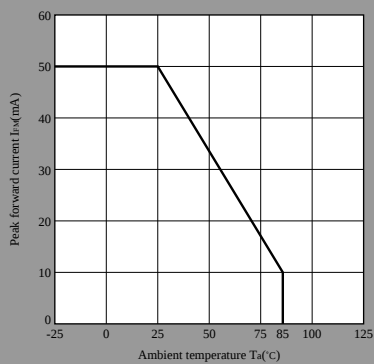

Luminous Intensity vs. Forward Current(Note)

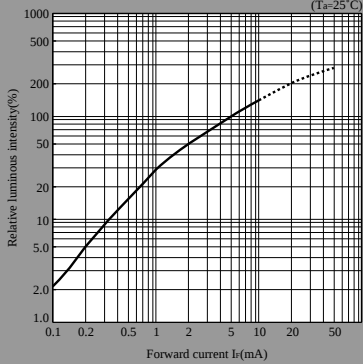


Duty Ratio vs. Peak Forward Current

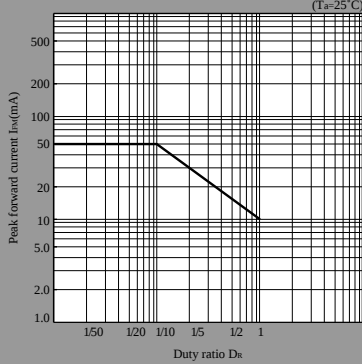


HD series


Forward Current Derating Curve

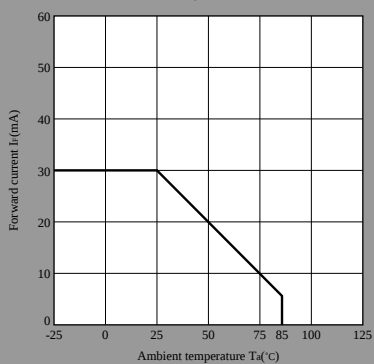


Forward Current vs. Forward Voltage(Note)

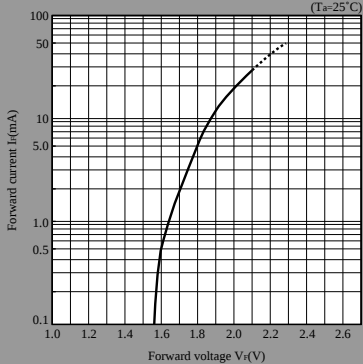


Luminous Intensity vs. Ambient Temperature(Note)

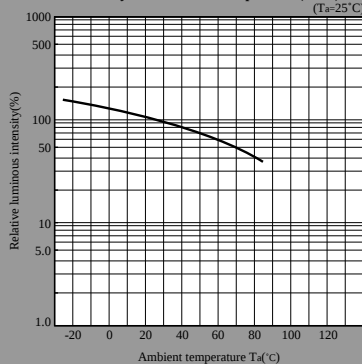


Peak Forward Current Derating Curve

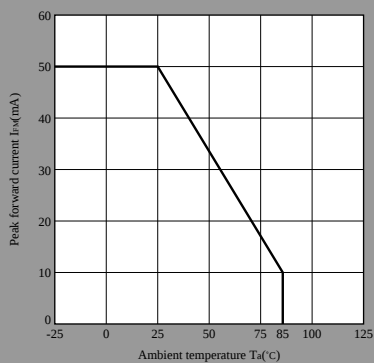

Luminous Intensity vs. Forward Current(Note)

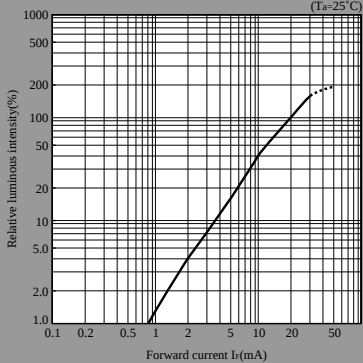

Duty Ratio vs. Peak Forward Current

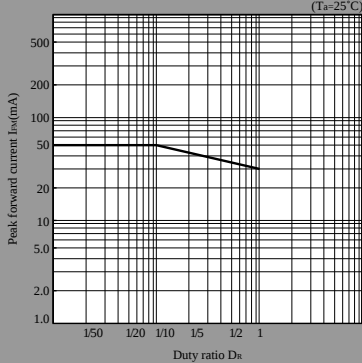


Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
(Internet) • Data for sharp's optoelectronic/power device is provided for internet.(Address <http://www.sharp.co.jp/ecg/>)


LED Lamp Characteristics Diagrams

HS series


Forward Current Derating Curve

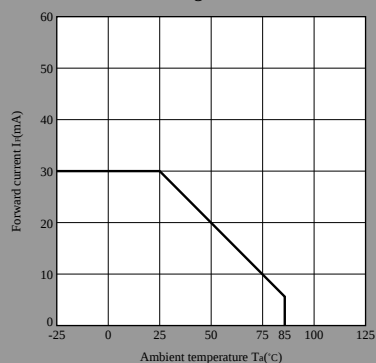


Forward Current vs. Forward Voltage(Note)

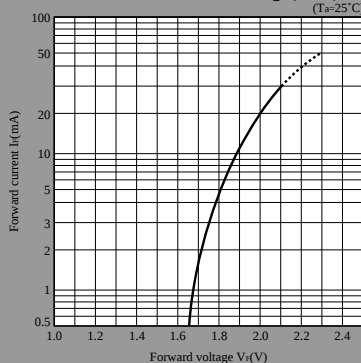


Luminous Intensity vs. Ambient Temperature(Note)

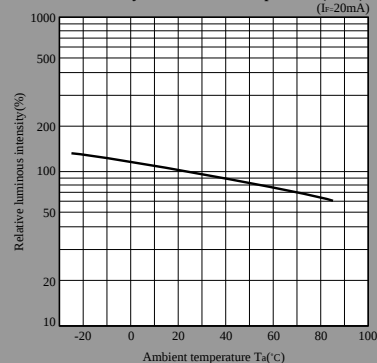


Peak Forward Current Derating Curve

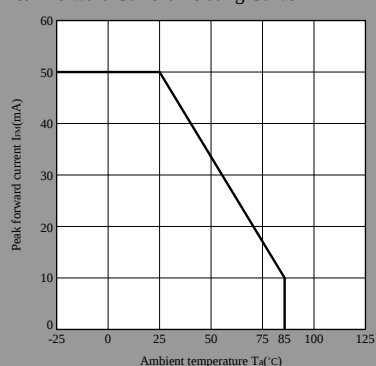

Luminous Intensity vs. Forward Current(Note)

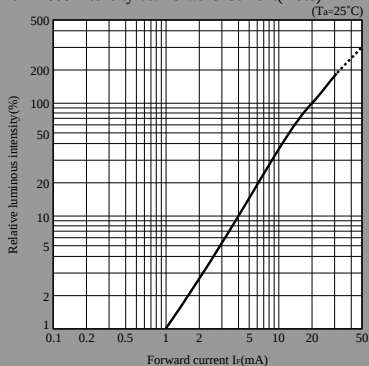


Duty Ratio vs. Peak Forward Current

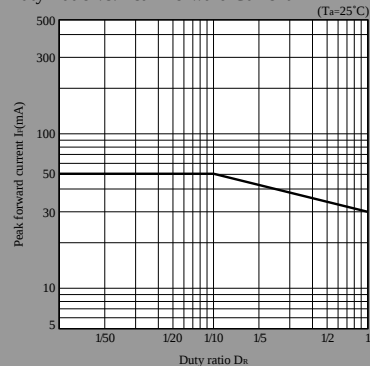


HY series


Forward Current Derating Curve

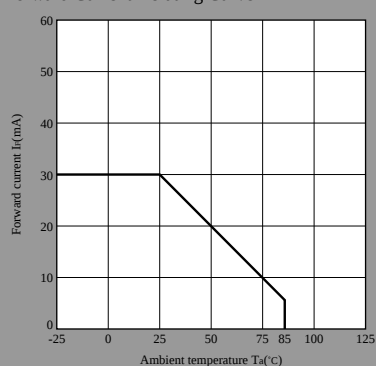


Forward Current vs. Forward Voltage(Note)

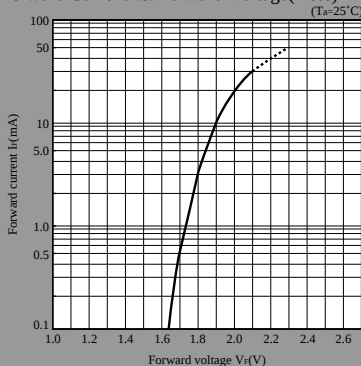


Luminous Intensity vs. Ambient Temperature(Note)

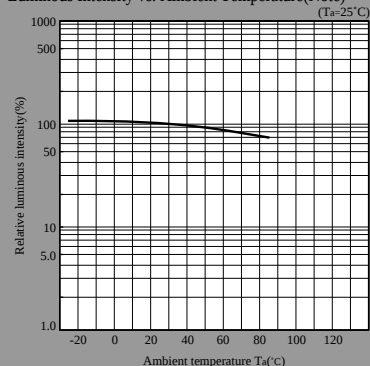


Peak Forward Current Derating Curve

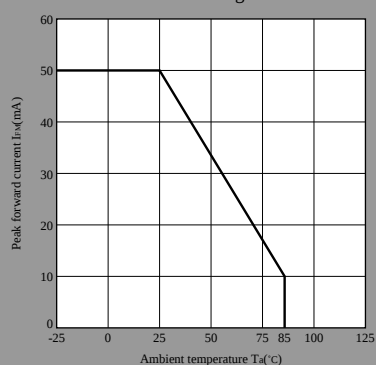

Luminous Intensity vs. Forward Current(Note)

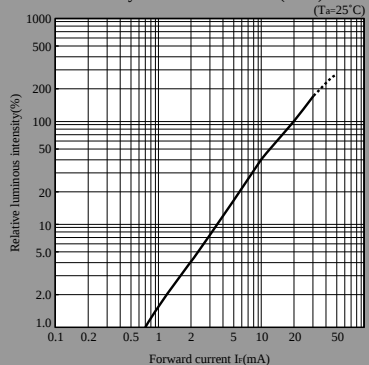

Duty Ratio vs. Peak Forward Current






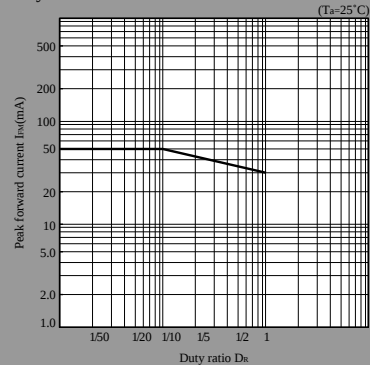


Note) Characteristics shown in diagrams are typical values. (not assurance value)







- (Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
- (Internet) • Data for sharp's optoelectronic/power device is provided for internet. (Address <http://www.sharp.co.jp/ecg/>)

LED Lamp Characteristics Diagrams

EG series

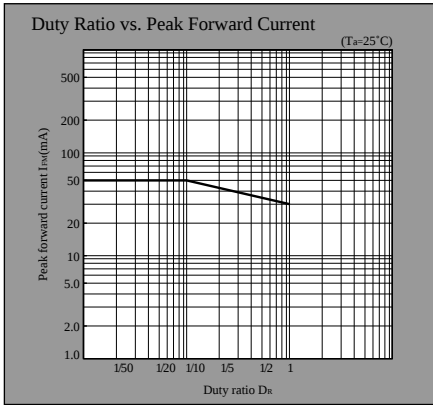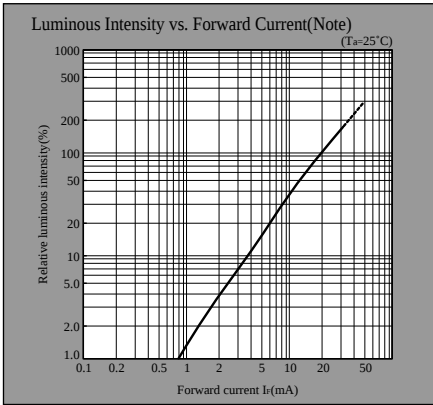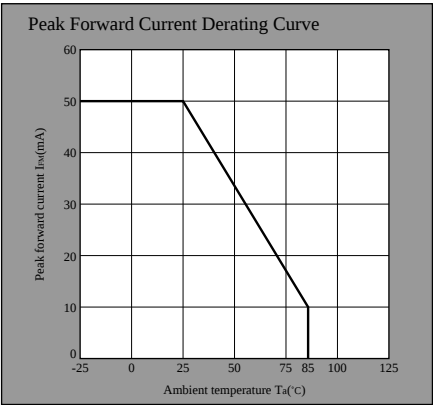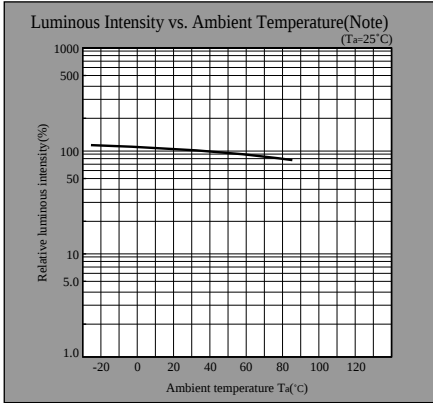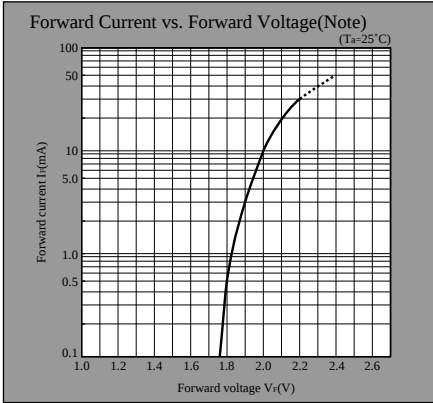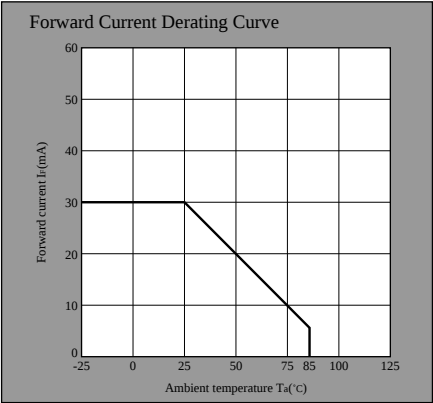

KG series

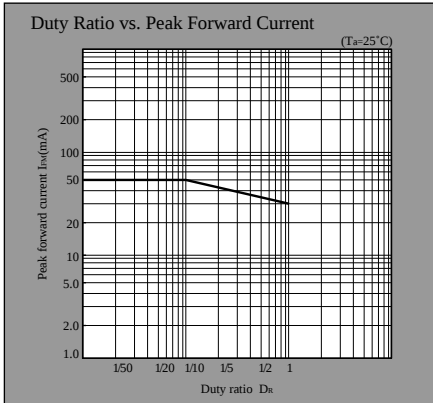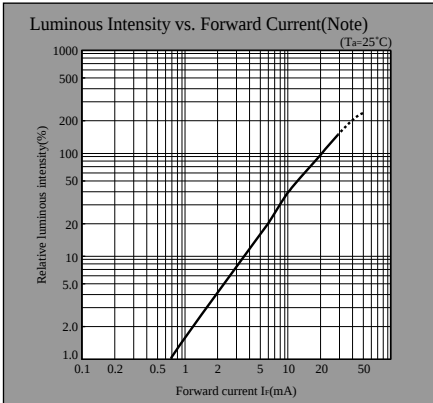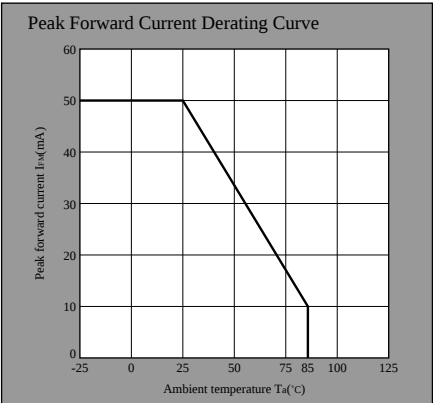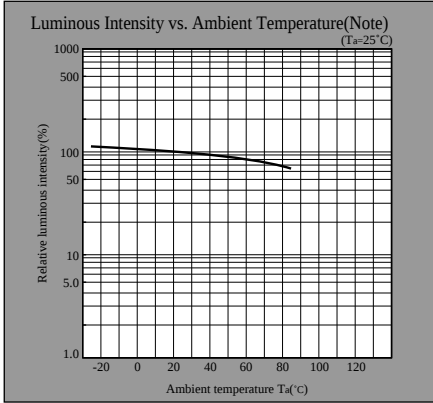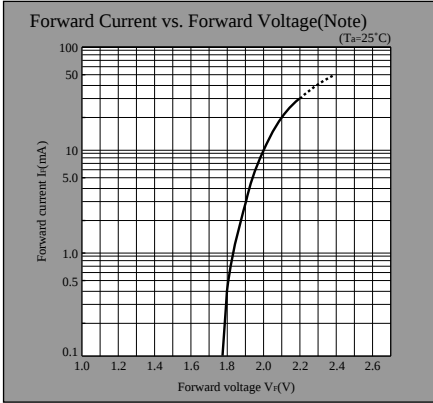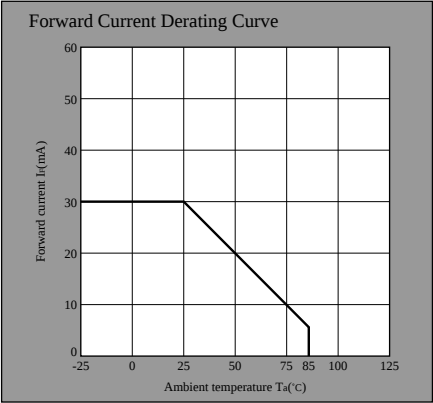

Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
(Internet) • Data for sharp's optoelectronic/power device is provided for internet.(Address <http://www.sharp.co.jp/ecg/>)